

Citation for published version:

Roake, E 2020, 'Pyro-electro-catalytic disinfection using the pyroelectric effect of low Curie temperature, lead-free ferroelectric ceramics', Joint Conference of the IEEE International Frequency Control Symposium & IEEE International Symposium on Applications of Ferroelectrics, USA United States, 19/07/20 - 23/07/20.

Publication date:
2020

Document Version
Other version

[Link to publication](#)

University of Bath

Alternative formats

If you require this document in an alternative format, please contact:
openaccess@bath.ac.uk

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Pyro-electro-catalytic disinfection using the pyroelectric effect of low Curie temperature, lead-free ferroelectric ceramics



UNIVERSITY OF
BATH



Centre for **Sustainable
& Circular** Technologies

E. Roake^{1,2}, M. Hopkins², B. Patenall³ and C. R. Bowen²

¹ EPSRC Centre for Doctoral Training, Centre for Sustainable Chemical Technologies, University of Bath, Bath, BA2 7AY, United Kingdom

² Department of Mechanical Engineering, University of Bath, Claverton Down, Bath BA2 7AY, United Kingdom

³ Department of Chemistry, University of Bath, Claverton Down, Bath BA2 7AY, United Kingdom

Introduction

In recent years there has been an increasing interest in pyroelectric materials for energy harvesting applications, as they have the potential to convert temperature fluctuations into electrical energy. This work investigates using low Curie temperature (T_c), lead-free, ferroelectric ceramics for pyroelectric-electrochemical catalytic reactions, such as water splitting^[1], dye degradation^[2,3,4] and disinfection of water^[5,6].

This work investigates barium strontium titanate (BST), with composition $\text{Ba}_{0.7}\text{Sr}_{0.3}\text{TiO}_3$, which has desirable pyroelectric properties for decontamination & disinfection of water:

- High pyroelectric coefficient, p
- High p to relative permittivity, ϵ_{33}^T , ratio
- Low T_c – BST $\approx 35^\circ\text{C}$
- Environmental and sustainability advantage
 - lead free, comprising earth abundant elements

Materials and Methods

BST powders were synthesised and used to produce a variety of materials structures, including finely ground powders, porous structures and dense materials. Freeze casting was used to produce porous materials with aligned pore structures which are beneficial for providing high polarisation and pore channels for high surface area contact with the solution. The powder, dense tablets and porous materials were characterised using:

- X-ray diffraction (XRD)
- Scanning electron microscopy (SEM)
- Phase angle, relative permittivity and conductivity vs. frequency measurements
- Polarisation – electric field (P-E) ferroelectric hysteresis loops

In this work, the powders and porous pyroelectric materials were placed in direct contact with the aqueous solutions containing bacteria to examine the potential of using temperature fluctuations and harnessing the pyroelectric effect for disinfection of water.

Results

The water decontamination experiments were carried out using *Escherichia coli* (E. coli) strains BW25113 and NCTC 10418 in the presence of BST powders. Vials containing the bacteria and BST particles, alongside control vials containing the bacteria only solution, were thermally cycled six times from 25°C – 45°C . The effectiveness of the pyroelectric BST powders for disinfection of the solutions was measured by counting and comparing the colony forming units (CFU) grown from the samples prior to & after the temperature cycling.

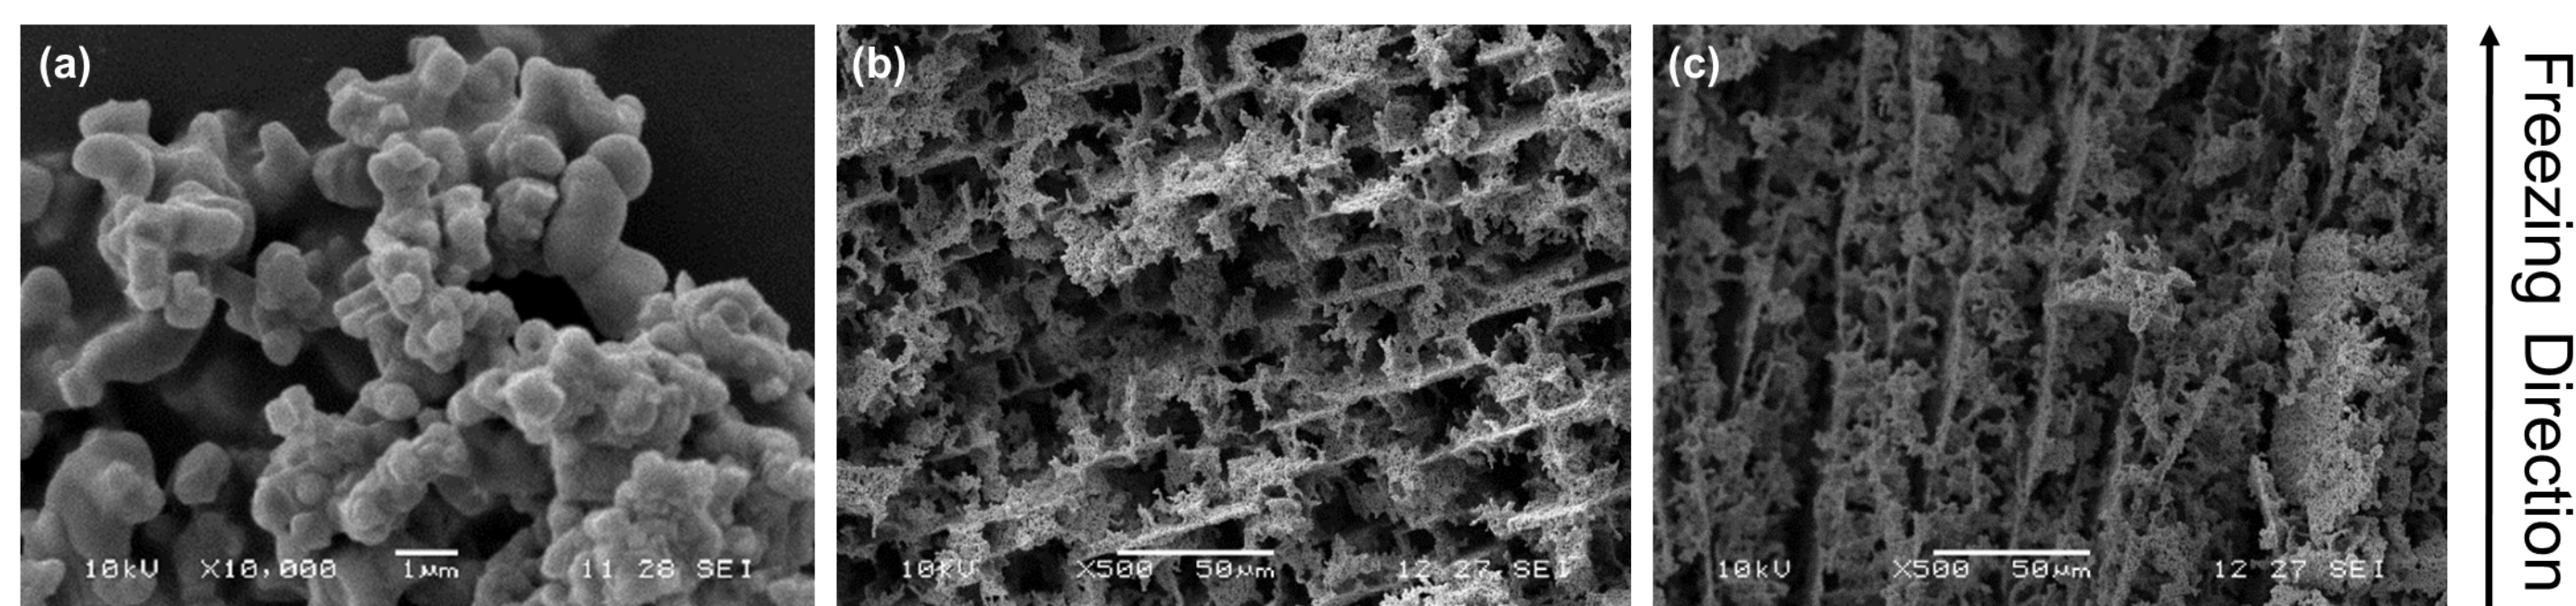


Figure 1: SEM micrographs of (a) the milled BST powders at x10K magnification and of the freeze-cast 50wt% solid loading BST ceramics, where the pores are shown (b) perpendicular and (c) aligned parallel to the direction of freezing.

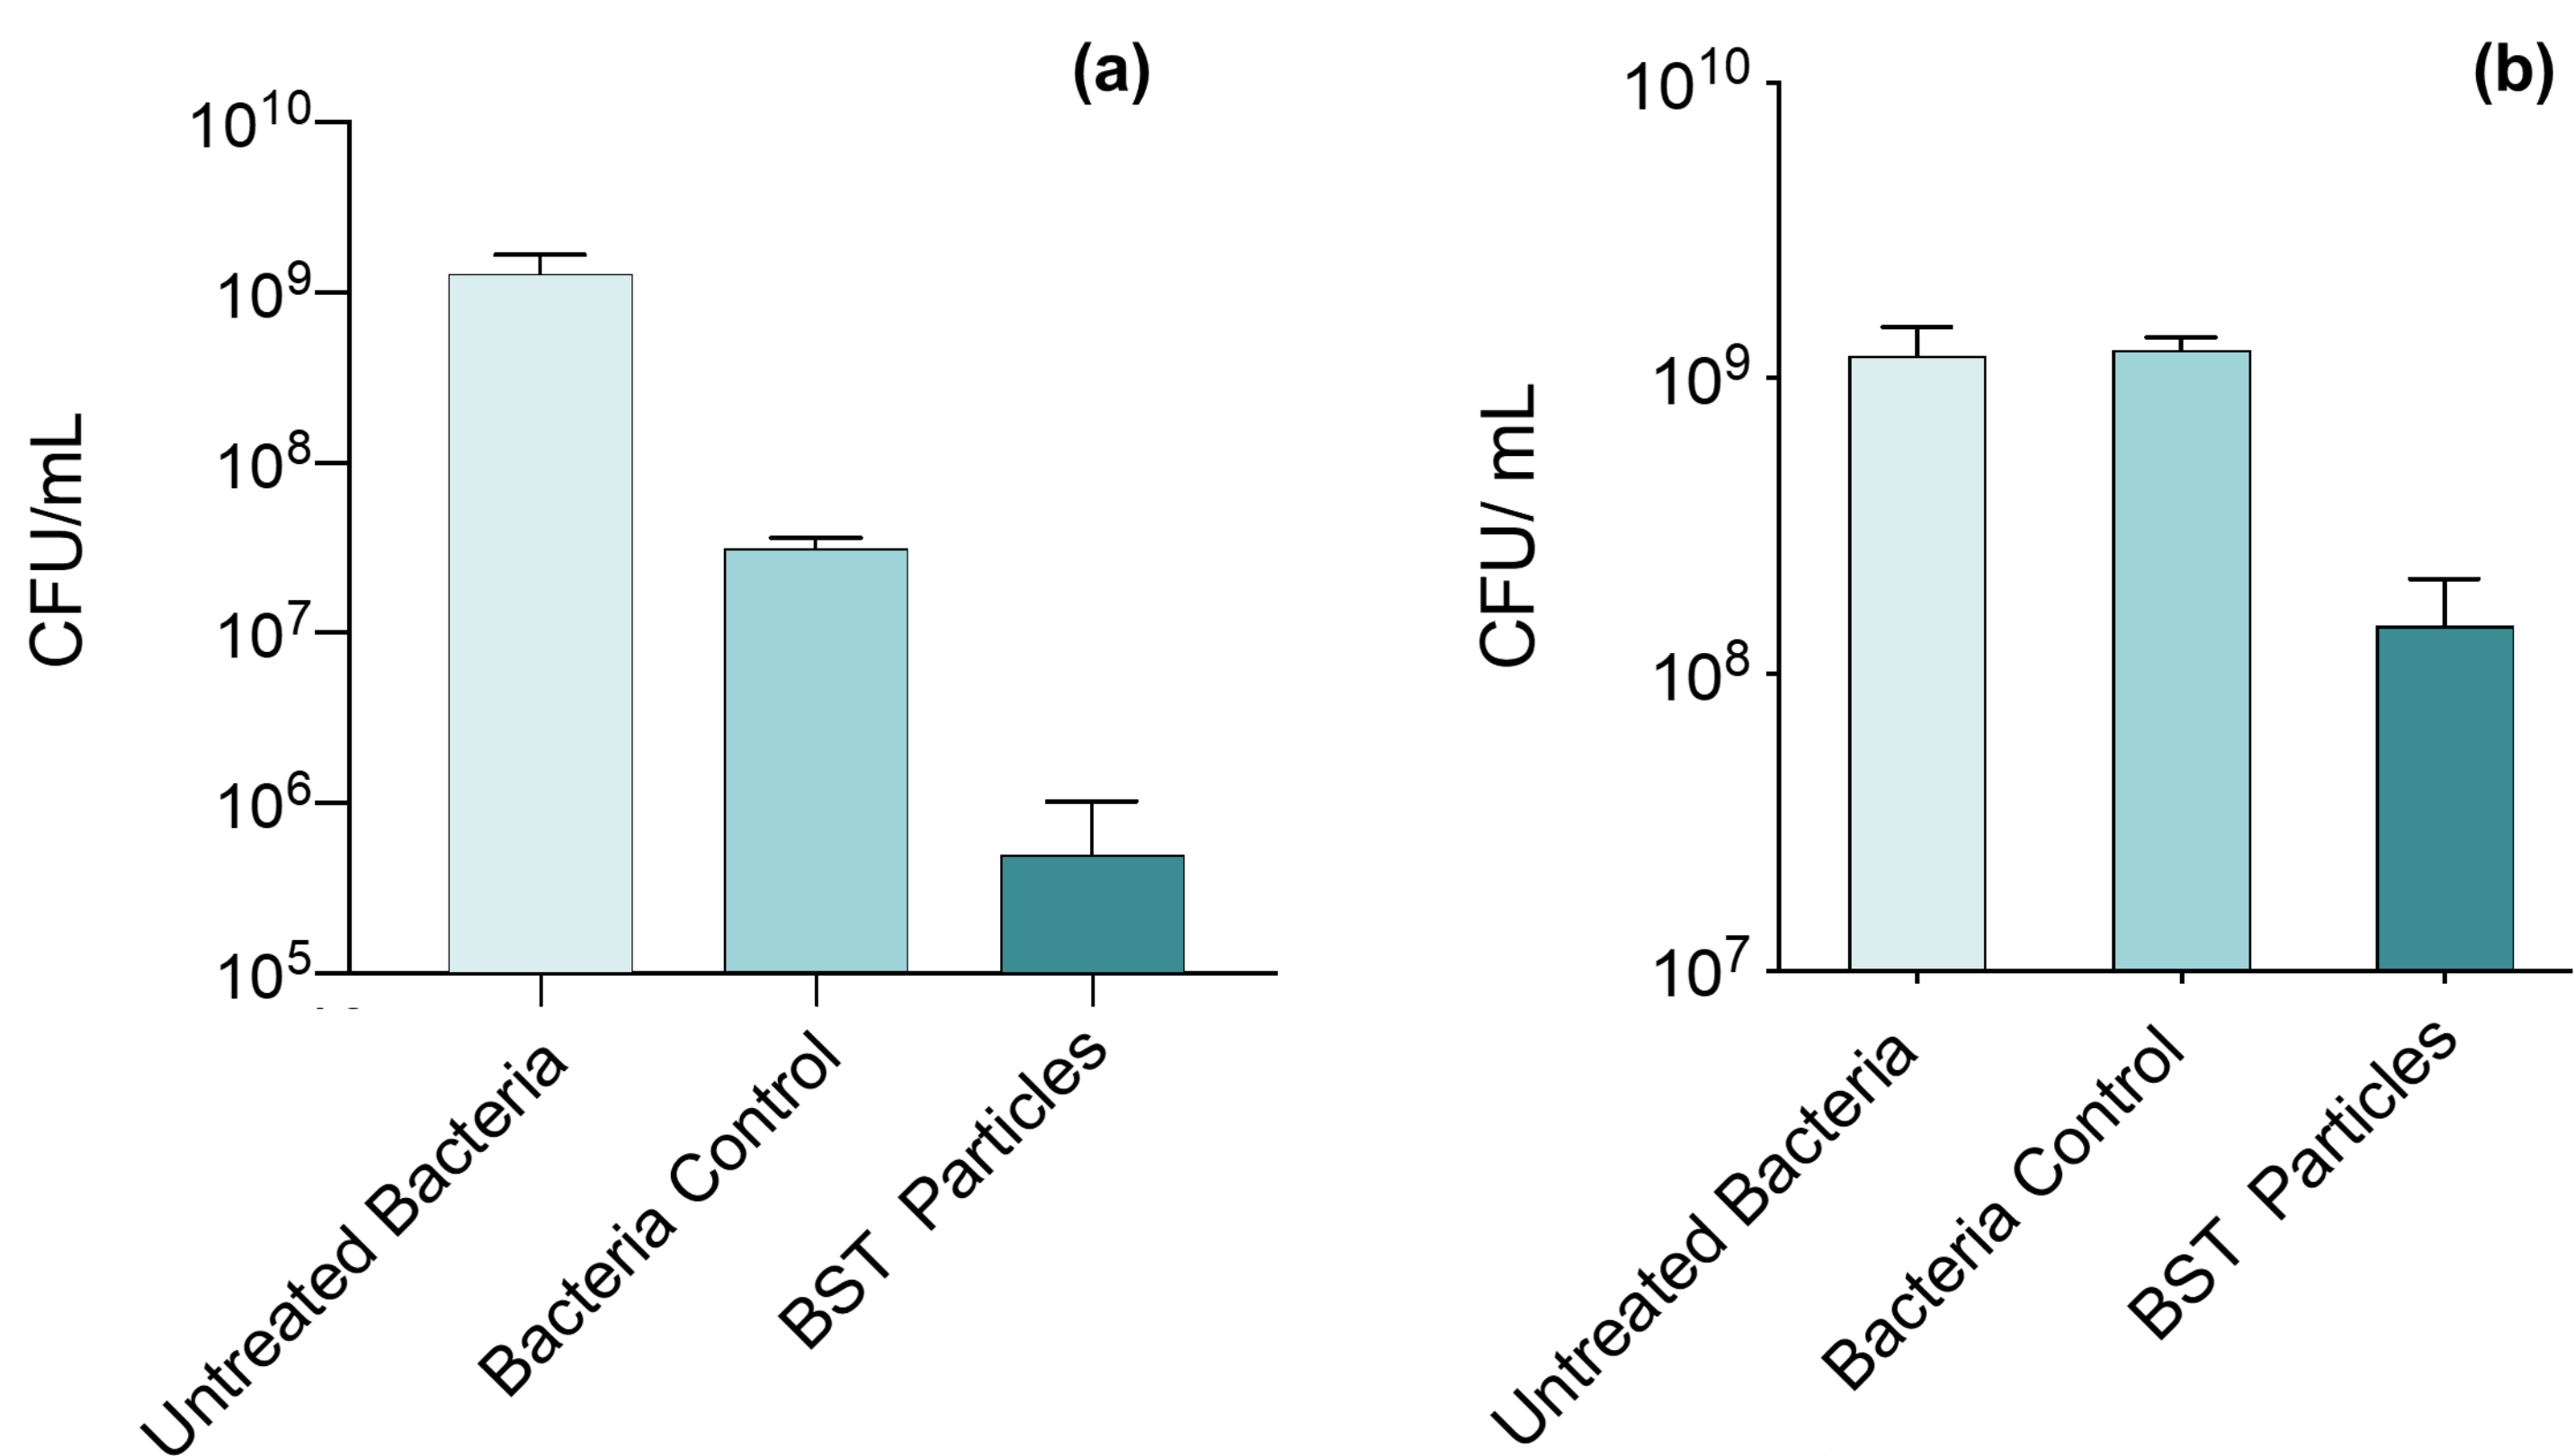


Figure 5: Viable cell counts of *Escherichia coli* (a) BW25113 and (b) NCTC 10418 in the presence of pyroelectric BST particles after 6 temperature cycles (25°C – 45°C) compared to the untreated bacteria culture and bacteria only solution after 6 temperature cycles.

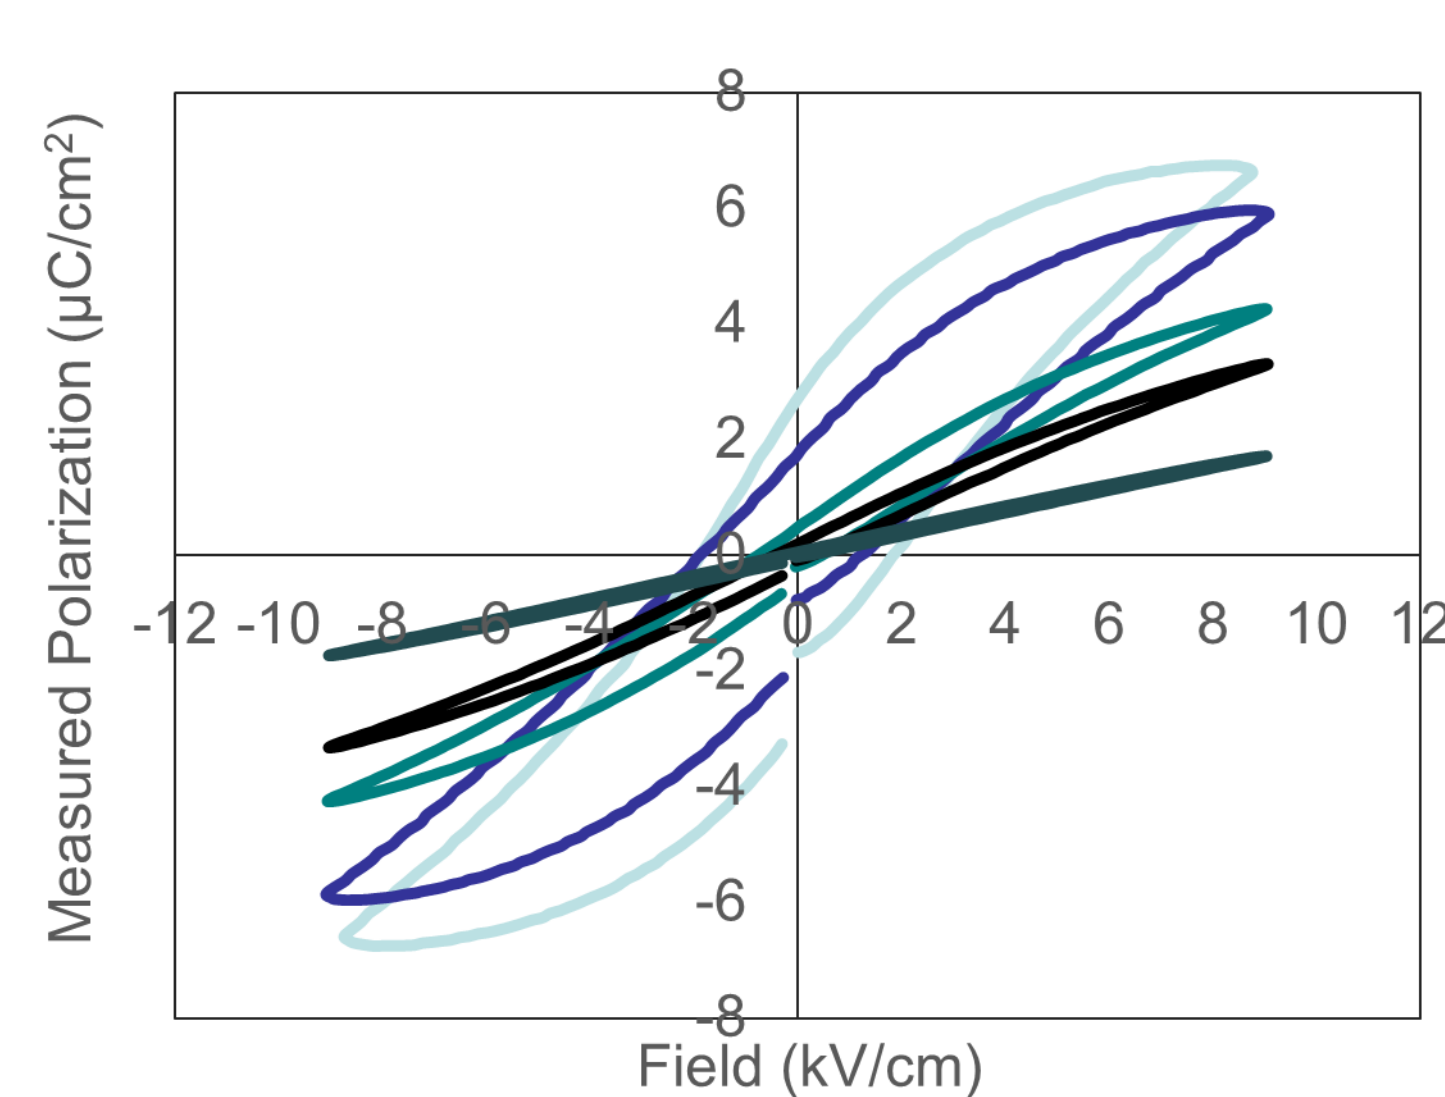


Figure 2: P-E hysteresis loops for BST dense pressed tablet at a range of temperatures from 0°C to 70°C .

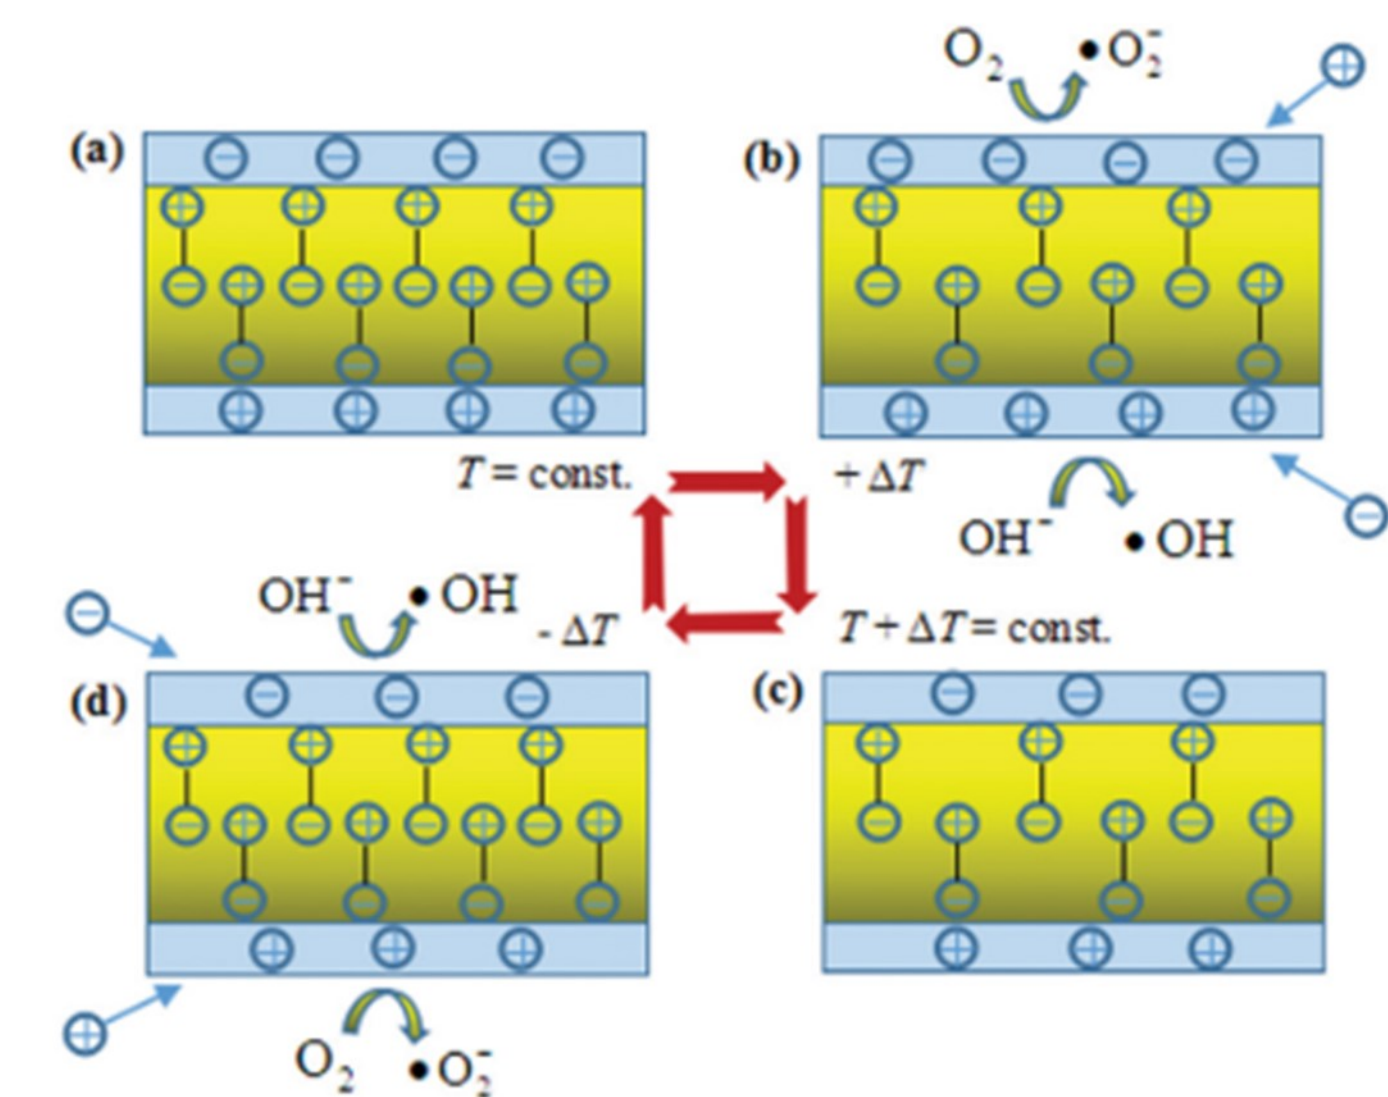


Figure 3: Schematic representation of the production of reactive oxygen species (ROS) by the pyroelectric effect, reproduced from reference 3.

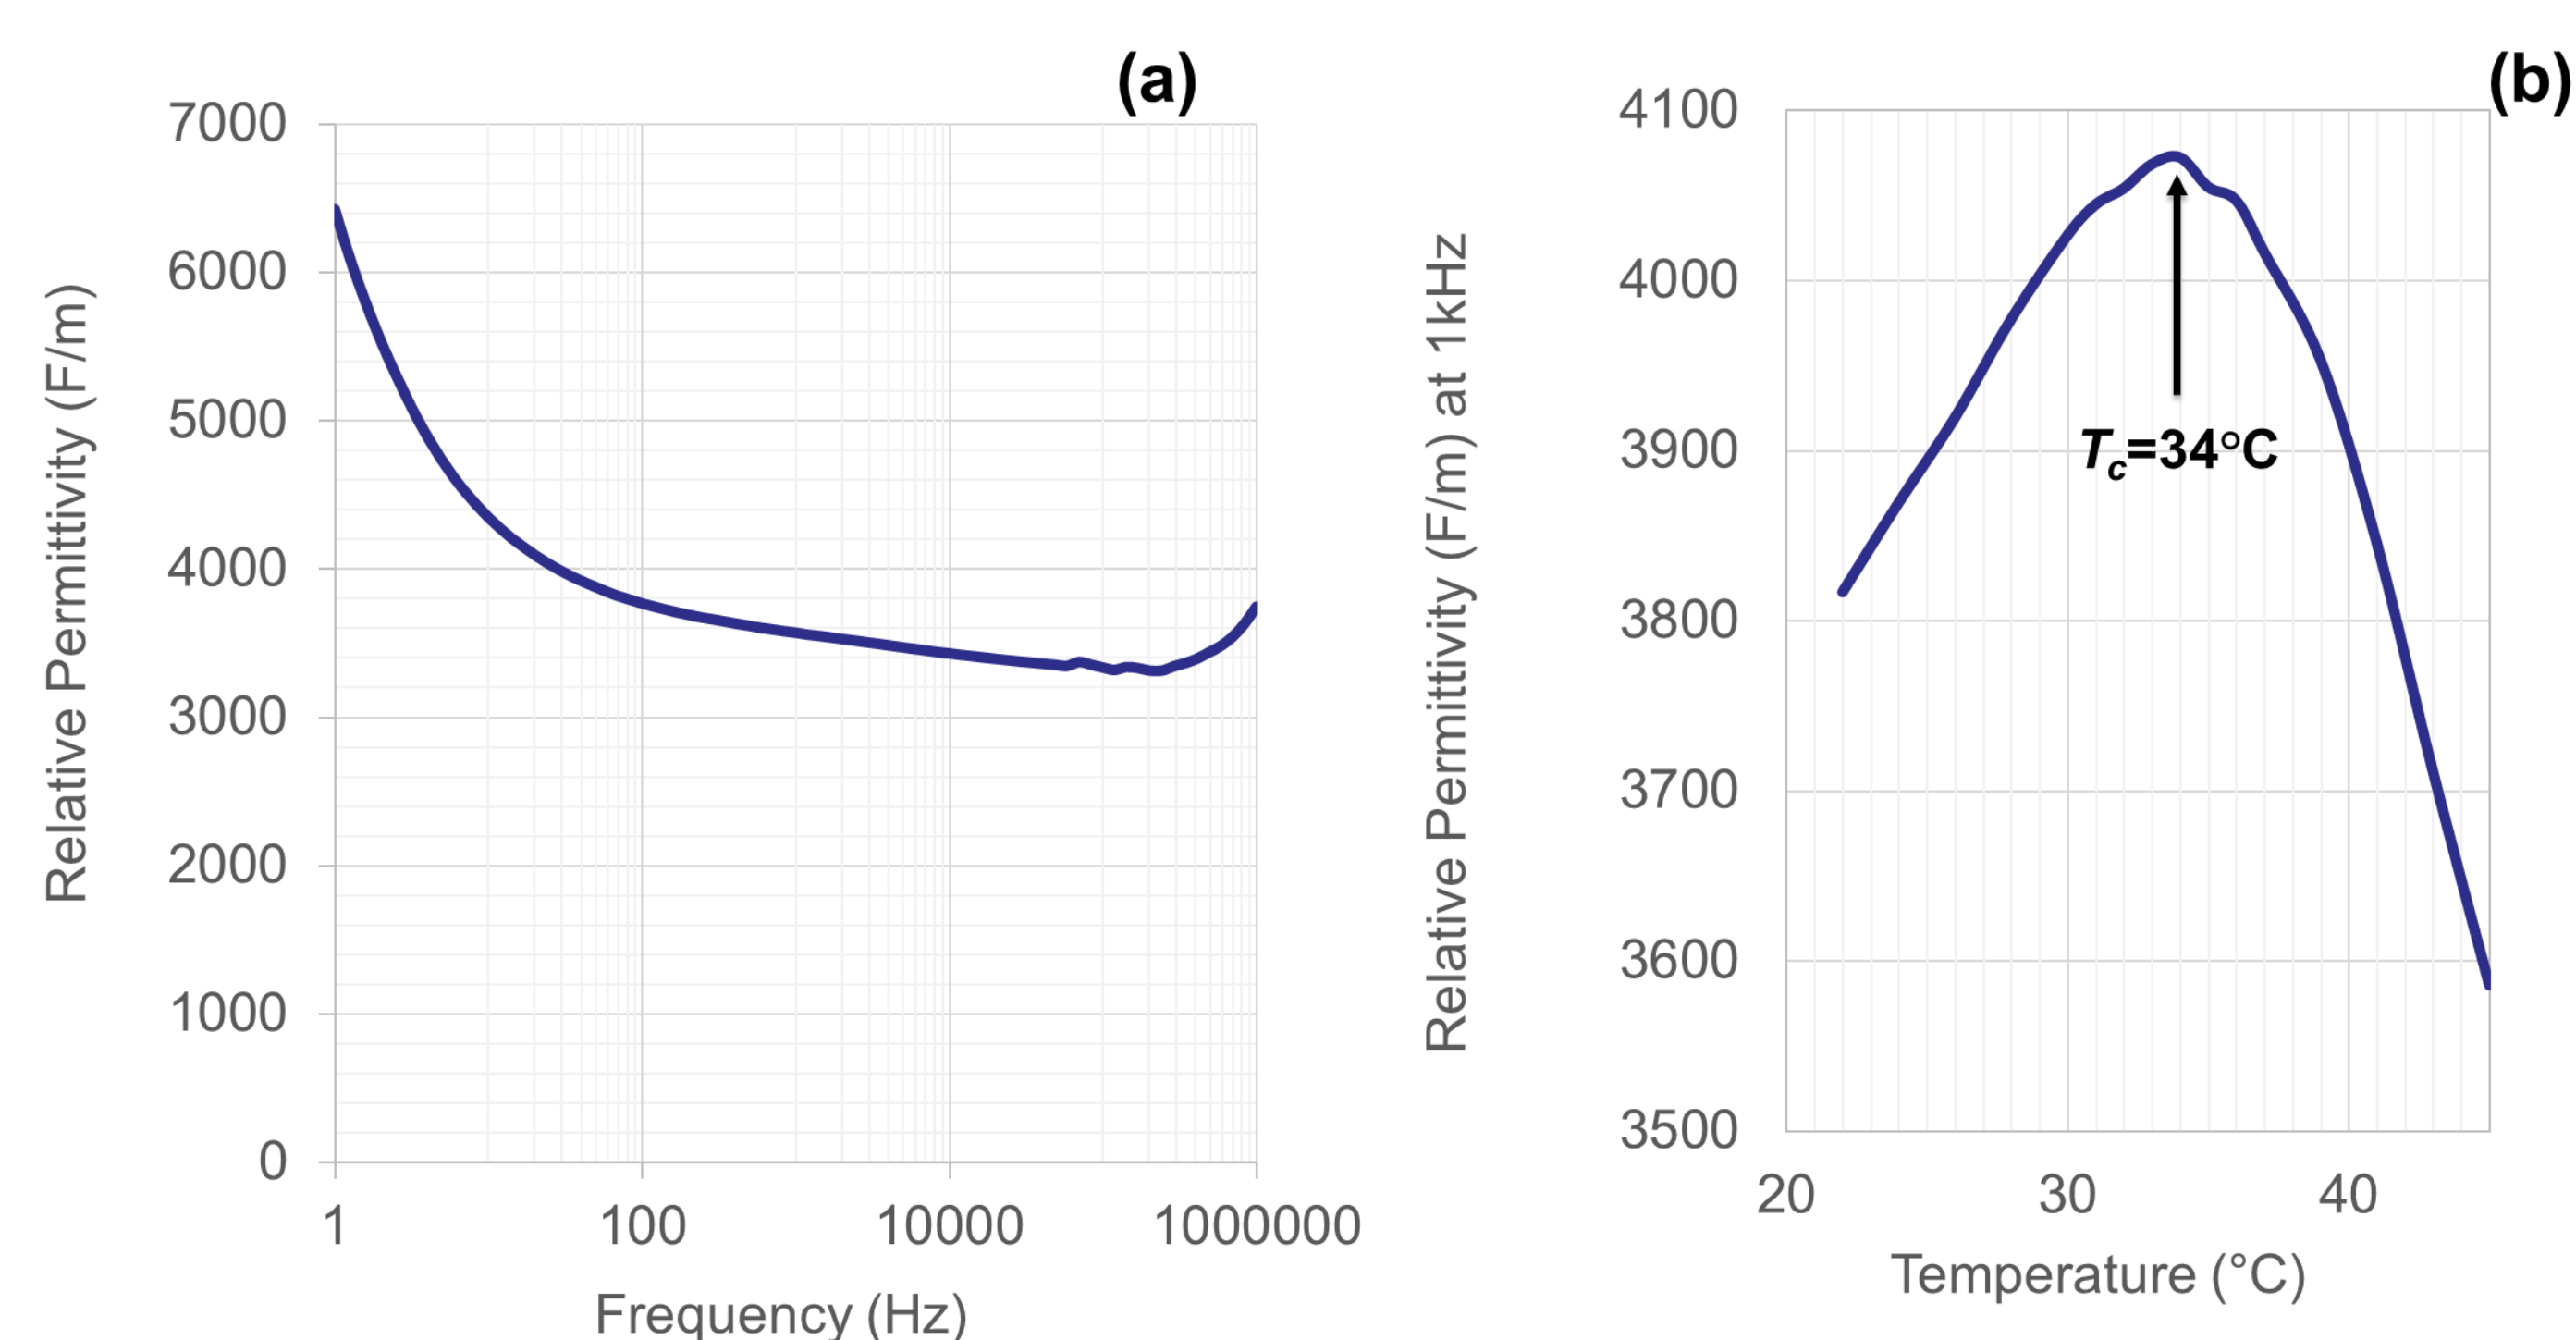


Figure 4: (a) Relative permittivity vs. frequency for dense BST at room temperature and (b) relative permittivity (F/m) at 1kHz from 22°C – 45°C , where the peak indicates the T_c for a dense pressed tablet of BST.

Conclusions

The results of these initial pyro-electro-catalytic disinfection of water experiments were very promising, showing up to a significant 3-log reduction in viable bacterial cell counts. Within microbiology-based applications such as water decontamination and wound care a 3-log reduction is considered the “gold standard”. Overall, BST powders were successfully used in the pyro-electro-catalytic disinfection of cultured bacteria in solution.

Future Work

- Optimise the materials and processes
- Experiments using samples of waste and effluent water
- Experiments using less temperature sensitive strains of E. coli, other bacteria strains and indicators commonly found in contaminated water

References

1. Y. Zhang, S. Kumar, F. Marken, M. Krasny, E. Roake, S. Eslava, S. Dunn, E. Da Como and C. R. Bowen, *Nano Energy*, 2019, 58, 183–191.
2. H. You, X. Ma, Z. Wu, L. Fei, X. Chen, J. Yang, Y. Liu, Y. Jia, H. Li, F. Wang and H. Huang, *Nano Energy*, 2018, 52, 351–359.
3. J. Ma, L. Chen, Z. Wu, J. Chen, Y. Jia and Y. Hu, *Ceram. Int.*, 2019, 45, 11934–11938.
4. J. Wu, W. Mao, Z. Wu, X. Xu, H. You, A. Xue and Y. Jia, *Nanoscale*, 2016, 8, 7343–7350.
5. A. Benke, E. Mehner, M. Rosenkranz, E. Dmitrieva, T. Leisegang, H. Stöcker, W. Pompe and D. C. Meyer, *J. Phys. Chem. C*, 2015, 119, 18278–18286.
6. E. Gutmann, A. Benke, K. Gerth, H. Böttcher, E. Mehner, C. Klein, U. Krause-Buchholz, U. Bergmann, W. Pompe and D. C. Meyer, *J. Phys. Chem. C*, 2012, 116, 5383–5393.



Engineering and
Physical Sciences
Research Council