

Citation for published version:
Morgan, BJ, Carrasco, J & Teobaldi, G 2016, 'Variation in surface energy and reduction drive of a metal oxide lithium-ion anode with stoichiometry: a DFT study of lithium titanate spinel surfaces', *Journal of Materials Chemistry A*, vol. 4, no. 43, pp. 17180-17192. https://doi.org/10.1039/C6TA05980E

DOI: 10.1039/C6TA05980E

Publication date: 2016

Document Version Peer reviewed version

Link to publication

University of Bath

Alternative formats

If you require this document in an alternative format, please contact: openaccess@bath.ac.uk

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policyIf you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Download date: 08, Mar. 2023

Variation in Surface Energy and Reduction Drive of a Metal Oxide Lithium-Ion Anode with Stoichiometry: A DFT Study of Lithium Titanate Spinel Surfaces

Benjamin J. Morgan,*,† Javier Carrasco,*,‡ and Gilberto Teobaldi*,¶

Department of Chemistry, The University of Bath, Claverton Down, Bath, BA2 7AY, CIC Energigune, Albert Einstein 48, 01510 Miñano, Álava, Spain, and Stephenson Institute for Renewable Energy, Department of Chemistry, The University of Liverpool, Liverpool, L69 3BX

Abstract

Li₄Ti₅O₁₂ is a "zero-strain" lithium-ion anode material that shows excellent stability over repeated lithium insertion–extraction cycles. Although lithium (de)intercalation in the bulk material has been well characterised, our understanding of surface atomic-scale–structure and the relationship with electrochemical behaviour is incomplete. To address this, we have modelled the Li₄Ti₅O₁₂ (111) , Li₇Ti₅O₁₂ (111) and α -Li₂TiO₃ (100), (110), and (111) α -Li₂TiO₃ surfaces using Hubbard-corrected density-functional theory (GGA+U), screening more than 600 stoichiometric Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ (111) surfaces. For Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ we find Li-terminated surfaces are more stable than mixed Li/Ti-terminated surfaces, which typically reconstruct. For α -Li₂TiO₃, the (100) surface energy is significantly lower than for the (110) and (111) surfaces, and is competitive with the pristine Li₇Ti₅O₁₂ (111) surface. Using

[†]Department of Chemistry, The University of Bath, Claverton Down, Bath, BA2 7AY

[‡]CIC Energigune, Albert Einstein 48, 01510 Miñano, Álava, Spain

[¶]Stephenson Institute for Renewable Energy, Department of Chemistry, The University of Liverpool, Liverpool, L69 3BX

these stoichiometric surfaces as reference, we also model variation in Li surface coverage as a function of lithium chemical potential. For Li₄Ti₅O₁₂, the stoichiometric surface is most stable across the full chemical potential range of thermodymamic stability, whereas for Li₇Ti₅O₁₂, Li deficient surfaces are stablised at low Li chemical potentials. The highest occupied electronic state for Li₇Ti₅O₁₂ (111) is 2.56eV below the vacuum energy. This is 0.3eV smaller than the work function for metallic lithium, indicating an extreme thermodynamic drive for reduction. In contrast, the highest occupied state for the α -Li₂TiO₃ (100) surface is 4.71 eV below the vacuum level, indicating a substantially lower reduction drive. This result demonstrates how stoichiometry can strongly affect the thermodynamic drive for reduction at metal-oxide–electrode surfaces. In this context, we conclude by discussing the design of highly-reducible metal-oxide electrode coatings, with the potential for controlled solid-electrolyte–interphase formation via equilibrium chemistry, by electrode wetting in the absence of any applied bias.

Introduction

The global transition from fossil fuels to renewable low-carbon primary energy sources is, at present, hindered by the need for secondary energy storage technologies that can operate reliably and cheaply. Lithium-ion batteries are widely used for secondary energy storage in personal electronics, and increasingly in hybrid electric vehicles, but scaling commercial technologies up to grid-scale capacities presents a challenge. Conventional Li-ion batteries use graphite anodes, which are low cost and have excellent lithium-intercalation kinetics. The low intercalation potential of graphite with respect to Li/Li⁺ means rapid charging causes metallic Li to plate at the electrode–electrolyte interface. Inhomogeneous Li plating can precipitate Li dendrite growth, eventually causing the cell to short-circuit. Conventional Li-ion batteries use liquid or polymer organic electrolytes, and the rapid release of energy during a short-circuit can initiate electrolyte combustion, presenting a serious safety concern. In addition, in graphite the intercalation and extraction of lithium produces large volume changes. Repeated charge–discharge cycles can cause the electrode to crack, potentially breaking contact between electrode particles and causing irreversible capacity

loss. This manifests as a gradual degradation of battery performance and contributes to limited battery lifetimes, increasing the lifetime costs of grid-scale storage.

One strategy to address these problems is to replace graphite anodes with a material less prone to lithium plating or cracking. A promising alternative is Li₄Ti₅O₁₂, which readily intercalates three lithium ions per formula unit at a voltage of 1.56 V versus Li/Li⁺ to form Li₇Ti₅O₁₂. Li₄Ti₅O₁₂ offers high Li-insertion and extraction rates, and importantly shows excellent stability over repeated cycles, attributed to two properties. First, Li₄Ti₅O₁₂ is a "zero-strain" intercalation compound, with Li intercalation producing lattice parameter changes smaller than 0.1%. Second, the relatively high potential for lithium intercalation of 1.56 V limits the formation of dendritic Li, which mitigates both the degradation of cell performance over repeated charge/discharge cycles and the risk of catastrophic short-circuiting.

The properties of bulk Li₄Ti₅O₁₂ have been studied in a number of previous works. ^{4–8}. ⁹ The operational characteristics of an electrode, however, depend not only on bulk properties, but also on the electrode–electrolyte interface. During Li⁺ insertion and extraction, lithium ions move across this interface and through the electrode near-surface region. Local diffusion barriers, which may differ from bulk values, determine insertion and extraction kinetics and associated overpotentials. ¹⁰ Electrochemical side-reactions at the electrode surface, such as continuous reduction of the electrolyte to form a solid-electrolyte interphase (SEI), may also degrade cell performance over repeated cycles. The thermodynamic driving force for reductive surface reactions, involving electron transfer from the electrode to the electrolyte, depends on the binding energy for electrons at the surface (relative to a fixed reference, such as the vacuum energy). Surface electron binding energies may deviate from bulk values, due to band bending, and electrochemical reactivity and stability of electrode surfaces therefore depend on their composition and atomic geometry.

A rational development of improved energy storage solutions requires understanding the relationships between electrode surface composition, geometry, and resulting electrochemical properties (SEI formation and evolution included). The challenge of experimentally resolving atomic-scale surface structure and electronic properties makes explicit computational modelling a pow-

erful complementary approach for relating electrode surface chemistry to electrochemical performance. Here we focus on the case of Li₄Ti₅O₁₂, which shows particularly interesting behaviour. In 2012, Kitta *et al.* ¹¹ studied the evolution of the atomic structure and electrochemical properties of a Li₄Ti₅O₁₂ (111) surface during initial lithium insertion and extraction cycles, using a combination of atomic force microscopy (AFM), transmission electron microscopy (TEM), and electron energy loss spectroscopy (EELS). Starting from a pristine atomically flat (111) surface, the first lithium insertion–extraction cycle produced an irreversible structural change, accompanied by a 10 nm increase in surface roughness. After this first cycle, the charge transfer resistance of the electrode/electrolyte interface fell by half, then remained constant for the following charge-discharge cycles. By analysing TEM data these authors identified an epitaxially-matched α -Li₂TiO₃ surface-layer phase formed during the first insertion/extraction cycle.

An epitaxially matched surface-layer phase, such as α -Li₂TiO₃ on Li₄Ti₅O₁₂, may be considered as a solid-electrolyte interphase component. Because the electrochemical performance of an electrode depends on the surface composition, the observations of Kitta *et al.* suggest an intriguing strategy for tailoring electrode surface properties. Targetted in-situ growth of specific surface-layer phases may lead to enhanced electrode rate capabilities and stability, and correspondingly increased operational lifetimes. In this respect the Li₄Ti₅O₁₂/Li₇Ti₅O₁₂/ α -Li₂TiO₃ system represents an exemplar case for studying the role of surface composition on electrochemical characteristics, as well as being directly relevant to the use of Li₄Ti₅O₁₂ as a high-stability Li-electrode.

To understand how a surface-layer α -Li₂TiO₃ phase affects the electrochemical properties of the Li₄Ti₅O₁₂ anode, there is a timely need for an atomically resolved structural description of the competing surfaces and a comparison of their electronic properties. These aspects are challenging to access experimentally: in the study of Kitta *et al.* the structural data lack the atomic resolution necessary to identify competing surface morphologies, while electronic properties, such as the electrostatic potential across the electrode–electrolyte interface region, are not accessible. Density functional theory (DFT) is a useful tool in both these regards, because it provides a direct description of atomic scale geometries and of electronic structure, and for this reason DFT is a

well established approach for studying simple surfaces. 12

In the case of $\text{Li}_x\text{Ti}_5\text{O}_{12}$ surfaces, computational modelling remains challenging. The presence of non-equivalent crystallographic cuts through the $\text{Li}_x\text{Ti}_5\text{O}_{12}$ unit cell means competing surface planes must be considered. Furthermore, to draw reliable conclusions, one must consider the size of the configurational space with regard to different arrangements of surface atoms, which can be computationally restrictive for materials with low unit-cell symmetries, such as $\text{Li}_x\text{Ti}_5\text{O}_{12}$. Previous computational studies of $\text{Li}_x\text{Ti}_5\text{O}_{12}$ surfaces have relied on various simplifying approximations. Gao *et al.* previously used DFT to investigate competing $\text{Li}_4\text{Ti}_5\text{O}_{12}$ (111) surface terminations. 13,14 The complex $\text{Li}_4\text{Ti}_5\text{O}_{12}$ cell was approximated using the simpler LiTi_2O_4 spinel structure, and possible rearrangements of atoms in the surface layer were not considered. Weber *et al.* have also used DFT to calculate surface energies of the (100), (110), and (111) $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and $\text{Li}_7\text{Ti}_5\text{O}_{12}$ surfaces. 15 Only a single geometry was modelled for each surface, and it is not known, therefore, whether these surface energies represent thermodynamically favoured low energy surfaces, or whether more stable surfaces with different surface planes or alternate surface atom arrangements exist. The primary objective of this work is to provide an extensive energy screening of $\text{Li}_4\text{Ti}_5\text{O}_{12}$, $\text{Li}_7\text{Ti}_5\text{O}_{12}$, and $\alpha\text{-Li}_2\text{TiO}_3$ surfaces.

To this end, we report DFT calculations of the (111) Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ surfaces, and the (100), (110), and (111) surfaces of α -Li₂TiO₃, considering a total of more than 600 surface structures. For the Li_xTi₅O₁₂ surfaces we consider competing surface terminations along the (111)-oriented unit cell, and perform a search over different configurations and stoichiometries of undercoordinated cations at each exposed surface. For α -Li₂TiO₃ the significant surface roughness observed by Kitta *et al.* ¹¹ for the (111)-grown surface means other crystallagraphic surfaces might be present in the final as-grown surface morphology, and we therefore compare energies of three low-index surfaces.

A complete theoretical description of $\text{Li}_x \text{Ti}_5 \text{O}_{12}$ surfaces under all accessible experimental conditions requires considering a comprehensive set of surface stoichiometries, each of which may become favoured at component atom chemical potentials. A computational study of all pos-

sible surface stoichiometries is impractical: an infinite number of surface configurations may be constructed. To ensure our study is computationally tractable, we first restrict our attention to *stoichiometric* surface models. For the stoichiometric surface models with lowest energy we then consider adding or removing surface atoms, to understand how the surface structure varies with chemical conditions.

We find that $\text{Li}_x \text{Ti}_5 \text{O}_{12}$ (111) surfaces with pure lithium terminations are more stable than surfaces with mixed lithium–titanium terminations, which tend to reconstruct. For $\alpha\text{-Li}_2\text{Ti}\text{O}_3$ the (100) surface energy is significantly lower than the (110) and (111) surface energies. This indicates that planar (111)-terminated surfaces are unstable with respect to highly-facetted (100)-terminated surfaces. This preference for surface facetting may contribute to the surface roughening observed by Kitta *et al.* during formation of the $\alpha\text{-Li}_2\text{Ti}\text{O}_3$ surface phase in $\text{Li}_x\text{Ti}_5\text{O}_{12}$. ¹¹ For $\text{Li}_4\text{Ti}_5\text{O}_{12}$ (111), under all conditions where $\text{Li}_4\text{Ti}_5\text{O}_{12}$ is thermodynamically stable, stoichiometric Li-terminated surfaces are predicted to be stable versus addition or removal of surface lithium. For $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111) however, Li-deficient surfaces may be stabilised within a narrow range of low lithium chemical potentials, before lithium deintercalation from the bulk to form $\text{Li}_4\text{Ti}_5\text{O}_{12}$.

By comparing electronic structures and electron binding energies of the $\text{Li}_x\text{Ti}_5\text{O}_{12}$ (111) and $\alpha\text{-Li}_2\text{TiO}_3$ (100) surfaces, we have investigated the thermodynamic driving force for reductive reactions at the $\alpha\text{-Li}_2\text{TiO}_3$ surface-layer phase compared to pristine $\text{Li}_x\text{Ti}_5\text{O}_{12}$. We find electrons are bound more strongly at the (100) $\alpha\text{-Li}_2\text{TiO}_3$ surface than at the (111) $\text{Li}_7\text{Ti}_5\text{O}_{12}$ surface, by 2.1eV. $\alpha\text{-Li}_2\text{TiO}_3$ (100) is therefore expected to be much less reductively reactive than $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111). For $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111) the energy difference between the highest occupied state and the vacuum energy is only 2.49eV. ¹⁶ This is even smaller than the work function of metallic lithium of $\sim 2.9\,\text{eV}$, ^{17,18} which is experimentally observed to reduce electrolytes even in the absence of an applied bias. Zero-bias SEI formation has been observed in the lithium-ion cathodeLiMn₂O₄ for surface facets with a large reduction drive, after electrolyte wetting. ^{19,20} The development of materials or coatings with highly reducing surface facets, which may allow controlled zero-bias SEI formation, is an interesting and possibly quite general design strategy for future high stability

electrodes. For this strategy to be rationally explored, it is necessary to link the composition and structure of an electrode surface to the relevant redox chemistry thermodynamics, which we provide here for the competing phases and surface stoichiometries of lithium-titanate spinel anodes.

Methods

Calculations were performed using the DFT code VASP, 21,22 with valence electrons described within a plane-wave basis and an energy cutoff of 500 eV. Valence–core interactions were treated with the projector augmented wave (PAW) method, 23,24 with cores of [Mg] for Ti, [He] for O, and [He] for Li. Calculations were performed using the PBE generalised gradient approximation (GGA) functional, 25 supplemented with a Dudarev +U correction applied to the Ti d states (GGA+U). The previous study of Lu et al. presented EELS data for Li₇Ti₅O₁₂ that showed distinct "Ti³⁺" and "Ti⁴⁺" oxidation states, 7 alongside DFT calculations using both standard GGA (PBE), and GGA+U (PBE+U) functionals. These GGA calculations qualitatively failed to describe the distinct Ti oxidation states observed in the EELS spectra. This is due to the self-interaction error inherent to standard GGA (and LDA) functionals, $^{26-28}$ and similar behaviour is well known for many transition metal oxides with mixed formal oxidation states. $^{29-31}$ By applying a +U correction of $U=4.5\,\mathrm{eV}$ to the Ti d states, Lu et al. predicted charge disproportionation into distinct "Ti³⁺" and "Ti⁴⁺" oxidation states, recovering qualitative agreement with the experimental EELS data. We use this same value of $U_{\mathrm{Ti}}^d=4.5\,\mathrm{eV}$, noting this is close to the value of $U_{\mathrm{Ti}}^d=4.2\,\mathrm{eV}$ used previously to study partially reduced TiO₂. 32,32,33

To obtain equilibrium structures and reference energies for bulk Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂, full geometry optimisations were performed for hexagonal cells with compositions Li₈Ti₁₀O₂₄ and Li₁₄Ti₁₀O₂₄ respectively, oriented with the close-packed (111) layers perpendicular to the c axis. k-point sampling used a $3 \times 3 \times 2$ Monkhorst-Pack mesh. Bulk α -Li₂TiO₃ was modelled using $3\sqrt{2}\times3\sqrt{2}\times3$ supercells of Li₂₄Ti₁₂O₃₆, with a $2\times3\times2$ Monkhorst-Pack mesh. All calculations were spin-polarised. Structures were deemed converged when all atomic forces were smaller than

 $0.01\,\mathrm{eV\,\mathring{A}}^{-1}$. For each structure zero-pressure volumes were obtained by performing a series of constant-volume cell relaxations and fitting the resultant energy-volume data to the Murnaghan equation of state. The optimised bulk structures were used as starting points for the surface models. For all surface models, to minimise spurious slab-slab interactions a vacuum gap of at least $15\,\mathring{A}$ was placed between slab periodic images along the c direction normal to the surface plane. The reference energy for metallic lithium, used to calculate surface energies as a function of the lithium chemical potential, was calculated using a body-centered cubic 2-atom unit cell with a $16\times16\times16$ Monkhorst-Pack k-point mesh.

Bulk Structures

Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ structures

Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ both consist of a cubic-close-packed oxide ion lattice with lithium and titanium ions occupying either tetrahedral or octahedral sites (Figure 1(a)). In the lithium-poor Li₄Ti₅O₁₂ phase cations are distributed over the tetrahedral and octahedral sites to give a defective spinel structure. Lithium occupies all the tetrahedral 8a sites and one sixth of the octahedral 16d sites, and titanium occupies the remaining 16d sites. The lithium-rich Li₇Ti₅O₁₂ phase has the same 16d site occupation (5:1 Ti:Li), but the tetrahedral 8a sites are vacant. Instead the octahedral 16c sites are all occupied by lithium, giving a pseudo-rocksalt structure (Figure 1(b)).

An alternative description of $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and $\text{Li}_7\text{Ti}_5\text{O}_{12}$ considers hexagonal $\text{Li}_8\text{Ti}_{10}\text{O}_{24}$ and $\text{Li}_{14}\text{Ti}_{10}\text{O}_{24}$ cells. Each (111) layer has eight tetrahedral and four octahedral sites available to cations, which occupy these sites in alternating (111) layers of [4 tetrahedra + 2 octahedra] / [4 octahedra]. The local structure depends on the specific distribution of lithium and titanium cations over these tetrahedral and octahedral lattice sites. In this work, we use the cation distributions first proposed by Lu *et al.* These authors used DFT calculations to optimise the distribution of lithium across the octahedral 16d sites in hexagonal cells containing two $\text{Li}_x\text{Ti}_5\text{O}_{12}$ formula units, oriented with the (111) close-packed layers perpendicular to the cell c direction.

The reported lowest energy distribution of cations for this cell size corresponds to a six-layer ...ABCDCB... stacking sequence, where each layer differs in the number and site occupation of the lithium and titanium cations (Figure 2). We have tested this Li₄Ti₅O₁₂ Li/Ti 16d arrangement for larger supercells by calculating energies for $2 \times 2 \times 1$ hexagonal supercells (192 atoms), and comparing the structure proposed by Lu *et al.* against 20 cells with random 16d Li/Ti configurations. All 20 16d-disordered configurations had higher energies than the ordered arrangement proposed by Lu *et al.* We also calculated energies for the (100)-oriented Li₄Ti₅O₁₂ cells proposed in separate works by Ouyang *et al.*⁴ and by Weber *et al.*¹⁵ These structures also gave higher energies than the structure proposed by Lu *et al.* (full details are given in the Supplementary Information). These are zero-temperature calculations, and in experimental samples some site disorder is expected from entropy or because non-equilibrium cation distributions may be kinetically trapped (although the lithium cations are expected to be mobile ³⁶). Any disorder will make the (111) layers identified in Figure 2 less distinct. Using the (111)-oriented model of Lu *et al.* therefore provides a limiting case where the differences between different (111) surface terminations are maximally distinct.

α-Li₂TiO₃ structure

Under ambient conditions, Li_2TiO_3 preferentially adopts the monoclinic β phase, which has been broadly studied due to potential applications as a microwave dielectric and as a possible tritium breeder in future fusion reactors. The α phase, which we are interested in here, is metastable in bulk systems. This phase can be considered a disordered pseudo-rocksalt, consisting of a fcc oxide-ion lattice with all the octahedral sites occupied by lithium or titanium. In this resepect, α -Li₂TiO₃ is similar to Li₇Ti₅O₁₂, but with the octahedral sites are occupied in a 2:1 Li:Ti ratio.

To generate a bulk structure with a reasonable cation distribution we considered more than 40 different cation configurations in a $3\sqrt{2}\times3\sqrt{2}\times3$ supercell containing 12 Li₂TiO₃ formula units. By calculating the relative energies for each geometry-optimised structure we found that our lowest energy cation distribution at zero temperature (i.e. neglecting configurational entropy)

corresponded to a structure with all $\langle 100 \rangle$ and $\langle 110 \rangle$ planes with Li₂TiO₃ stoichiometry. ⁴⁰

(111) Surface Models

To construct models of the $Li_xTi_5O_{12}$ (111) surfaces, the optimised bulk structures were cleaved along (111) planes to generate two-dimensional slab geometries. $Li_4Ti_5O_{12}$ and $Li_7Ti_5O_{12}$ have six-layer repeat unit [ABCDCB] stacking sequences along the [111] direction and any layer could, in principle, be chosen as a surface layer. The cation distribution means that each layer contains different numbers of lithium and titanium cations, and therefore has a different formal charge (cf. Figure 2). Hypothetical slabs with asymmetric layer sequences are therefore *dipolar*: their (111) surfaces are non-equivalent, leading to poorly defined surface energies. ⁴¹ The asymmetric charge distribution corresponds to a dipole perpendicular to the surface planes, which introduces long-ranged dipole–dipole interactions between periodic slab images, and surface energies formally diverge with increasing slab thicknesses. To avoid these issues we consider only symmetric layer stacking sequences, which give non-polar slabs with well defined surface energies. In practice, this requires slabs with odd numbers of layers, and layers A or D at their centre. In the first instance, we consider surface models that maintain corresponding bulk stoichiometries, i.e. $Li_4Ti_5O_{12}$ or $Li_7Ti_5O_{12}$. This means surface energies are simply given by the difference in energies between the two-dimensional slabs and equivalent bulk systems, according to

$$E_{\text{surface}} = \frac{1}{2A} \left(E_{\text{slab}} - E_{\text{bulk}} \right), \tag{1}$$

where E_{slab} is the energy of the surface cell, E_{bulk} is the energy of an equal number of formula units in the bulk, and A is the surface area of one face in the slab model.

Surface stoichiometries may of course differ from those of the corresponding bulk phase. The large (111) surface unit cells of Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ mean that considering variable surface stoichiometries greatly increases the number of possible surfaces that could be constructed, beyond the already large number of surfaces to be considered under fixed stoichiometries. An exhaustive

search over surface structures that takes into account variable stoichiometries, surface terminations, and surface structures is not computationally tractable within a first-principles approach. Below we show that the lowest energy stoichometric (111) surfaces for Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ are lithium-terminated. To assess the relative stabilities of surfaces with variable lithium stoichiometries across relevant chemical conditions, we take these lowest-energy stoichiometric surfaces as templates, and then add or remove surface lithium at representative surface sites. The surface energies of the resulting non-stoichiometric surfaces depend on the lithium chemical potential, according to

$$E_{\text{surface}}(\mu_{\text{Li}}) = \frac{1}{2A} \left(E_{\text{slab}} - E_{\text{bulk}} - \Delta n_{\text{Li}} \left(E_{\text{Li}} + \mu_{\text{Li}} \right) \right), \tag{2}$$

where $\Delta n_{\rm Li}$ is the number of lithium atoms added or removed at the surface, $E_{\rm Li}$ is the lithium reference energy, calculated for metallic bcc Li, and $\mu_{\rm Li}$ is the lithium chemical potential. In a lithium-ion battery $\mu_{\rm Li}$ is equivalent to the cell voltage relative to metallic Li (scaled by Faraday's constant) in the limit that charging or discharging takes place reversibly.

Within the dual constraints of symmetric layer-stacking sequences and bulk stoichiometries, we initially constructed a range of seven-layer slabs with stacking sequences of (A)BCDCB(A) or (D)CBABC(D). B- and C-terminated slabs cannot be constructed with planar (111) surfaces to be symmetric and have bulk stoichiometry. The surface layers, indicated in parentheses, appear twice: if all the constituent cations were included this would give the slabs stoichiometries different from the corresponding bulk phases. To maintain bulk stoichiometries, in each surface model half the cations were removed from one surface layer, (A) or (D), and moved to the opposite surface, following Tasker's method. This gives equivalent (symmetric) surface layers with half the cation occupancy of the corresponding bulk layers. The (111)-oriented Li₇Ti₅O₁₂ unit cell has 4 octahedral cation sites (occupied) in each (111) layer. At the A-terminated and D-terminated surfaces, respectively, there are 4 Li and {2 Li + 2 Ti} "under-coordinated" cations, and stoichiometric slab models with zero surface-normal dipoles are generated by placing 2 of these cations (2 Li for the A-terminated surface, 1 Li + 1 Ti for the D-terminated surface) on the opposite slab

surface. In Li₄Ti₅O₁₂, each (111) layer contains only three cations. To construct non-polar slab models with both surfaces equivalent we therefore used expanded (2×1) surface supercells for all Li₄Ti₅O₁₂ surface calculations (Figure 3). Our screening calculations used single–repeat-unit slabs, corresponding to compositions of Li₁₆Ti₂₀O₄₈ (Li₄Ti₅O₁₂) and Li₁₄Ti₁₀O₂₄ (Li₇Ti₅O₁₂).

Eliminating slab surface dipoles by symmetrically distributing the surface cations between both surfaces generates a number of possible cation arrangements at the surface: all of these formally remove the slab dipole since the two surfaces become stoichiometrically equivalent. Surface energies, however, can be expected to depend on the specific cation distribution for each partially coordinated surface layer. To explore this in detail, for each of the four studied Li_xTi₅O₁₂ (111) surfaces: Li₄Ti₅O₁₂ (111)_A, Li₄Ti₅O₁₂ (111)_D, Li₇Ti₅O₁₂ (111)_A, and Li₇Ti₅O₁₂ (111)_D; we identified all symmetry inequivalent cation distributions commensurate with the appropriate stoichiometry and zero-dipole constraints.

The oxide sub-lattice in Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ is a face-centered cubic array. The (111) surfaces therefore can be considered a triangular lattice of sites with trigonal symmetry. Each surface site can be classified as "octahedral" or "tetrahedral", depending on whether it shares a (111) face with an octahedral site in the sub-surface layer (see Figure 3). In each phase the cation sublattice arrangement of lithium and titanium lowers the surface symmetry. In particular, subsurface octahedral sites may be occupied by either lithium or by titanium, or in the cae of Li₄Ti₅O₁₂ may be unoccupied. This subsurface structure can be expected to influence the preferred arrangement of surface cations. A-terminated surfaces have subsurface B layers, and D-terminated surfaces have subsurface C layers. Taking into account the symmetry of the appropriate subsurface layer, we generated all symmetry-inequivalent surface cation configurations for each of the four stoichiometric surfaces considered, using the bsym symmetry analysis code. ⁴³ This gives 9 non-equivalent configurations for Li₇Ti₅O₁₂A, 5 configurations for Li₇Ti₅O₁₂D, 154 configurations for Li₄Ti₅O₁₂A, and 438 configurations for Li₄Ti₅O₁₂D. Because of the large number of surface configurations for the Li₄Ti₅O₁₂ slab models, these were initially optimised using a Ti PAW pseudopotential with a [Ar] core, before refining the structures of the 10 lowest energy configurations with the [Mg] core

PAW pseudopotential.

Results

Surface energies and preferred cation configurations

Stoichiometric surfaces

The surface energies for A-terminated and D-terminated Li₇Ti₅O₁₂ (111) slabs are plotted in Figure 4. The surface energies for all the A-terminated slabs, which have only Li in the surface layer, are significantly lower than for the D-terminated slabs, which have mixed Li/Ti surfaces. This indicates a much greater energy cost for titanium versus lithium being under-coordinated at the surface.

The lowest energy configuration for the Li₇Ti₅O₁₂ (111)_A surface has half the surface lithium in tetrahedral sites that face-share with subsurface lithium octahedra, and half in octahedral sites (Figure 4 (inset)). These are arranged in a hexagonal pattern that is consistent with minimising the Coulomb energy of the surface configuration: surface Li maximise their mutual separation, and only face-share with sub-surface sites containing single-valence lithium.

The larger surface cells necessary to maintain stoichiometry for the Li₄Ti₅O₁₂ (111) surfaces give a large number of inequivalent structures. The surface energies of these are plotted in Figure 5. As for the Li₇Ti₅O₁₂ surfaces, the A-terminated surfaces, which only have Li surface cations, have much lower energies than the D-terminated mixed Li/Ti-terminated surfaces. A large number of low energy configurations exist, with representative surface cation arrangements shown in Figure 5. These surface configurations are equivalent by symmetry, and are similar to the hexagonal arrangement found for Li₇Ti₅O₁₂ (111)_A. Two thirds of the surface Li occupy tetrahedral sites that face-share with vacant sub-surface octahedra, and the remaining third of the surface Li occupy octahedral surface sites, avoiding face-sharing with sub-surface Ti octahedra. This arrangement gives a partial hexagonal motif. The large number of sampled configurations with very similar low

energies is due to lithium ions initially placed close to the empty sub-surface octahedral site each relaxing to the face-sharing tetrahedral site.

Our focus on stoichiometric surfaces means our calculation set excludes non-stoichiometric B- and C-terminated (111) surfaces. The B- and C-terminated surfaces would present undercoordinated surface Ti atoms (cf. Figure 2), similarly to the included D-terminated surfaces. Because the D-terminated (Li/Ti) surfaces have larger surface energies than the A-terminated (purely Li) surfaces, we expect the B- and C-terminated (111) surfaces to also be disfavoured with respect to the A-terminated surfaces for both Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂. A second consideration is that while the observed surface reconstructions observed for many of the D-terminated surfaces do not lower the surface energy enough to become competitive with the A-terminated surfaces, more complex reconstructions to low energy surface terminations might exist. To examine this possibility, a broader search over surface configurations would be necessary, using more sophisticated structure prediction methods such as evolutionary algorithms. 44,45

The calculated surface energies for the lowest energy $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111) surfaces are compared to the $\alpha\text{-Li}_2\text{TiO}_3$ (100), (110), and (111) surface energies in Table 1. For $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111) the surface energies are $0.022\text{eV}\,\text{Å}^{-2}$ and $0.038\,\text{eV}\,\text{Å}^{-2}$ respectively. These surface energies are much lower than those previously calculated by Weber *et al.* using PBE, who reported energies of $0.106\,\text{eV}\,\text{Å}^{-2}$ and $0.105\,\text{eV}\,\text{Å}^{-2}$ respectively. This previous study considered only a single slab geometry for each stoichiometry and surface orientation. The much lower surface energies for the most stable surfaces considered here suggest that the surface models used in this previous work correspond to unstable high energy surface terminations. This difference in calculated values illustrates the need to consider competing surface terminations when modelling surfaces of materials with complex unit cells.

For α -Li₂TiO₃, the (111) surface energy is significantly higher than the Li_xTi₅O₁₂ (111) surface energies, at 0.091 eV Å⁻². This α -Li₂TiO₃ surface underwent a spontaneous disordered reconstruction of the surface and sub-surface layers during geometry optimisation. The (110) surface energy is similarly disfavourable, at 0.118 eV Å⁻². The (100) α -Li₂TiO₃ surface however

has a much smaller surface energy of $0.039\,\mathrm{eV\,\mathring{A}}^{-2}$, which is not unexpected for a (pseudo)-rocksalt structure, ⁴⁷ and is now comparable to the Li₇Ti₅O₁₂ (111) surface energy. Surface phases of α -Li₂TiO₃ are therefore predicted to preferentially express (100) surfaces, and formation of α -Li₂TiO₃ on (111)-oriented Li_xTi₅O₁₂ is expected to produce highly facetted morphologies, which provides a possible explanation for the greatly increased surface roughness observed with α -Li₂TiO₃ surface phase formation by Kitta *et al.* ¹¹

Table 1: Calculated surface energies for the considered Li₄Ti₅O₁₂, Li₇Ti₅O₁₂, and α -Li₂TiO₃ surfaces. For the low energy Li₄Ti₅O₁₂ (111), Li₇Ti₅O₁₂ (111), and α -Li₂TiO₃ (100) surfaces, doubling the slab model thickness to 13 layers for Li_xTi₅O₁₂ and to 12 layers for α -Li₂TiO₃ (100) changed the calculated surface energy by less than 4 meV Å⁻². * indicates the α -Li₂TiO₃ (111) surface, which underwent significant surface reconstruction.

surface		energy [eV Å ⁻²]
Li ₄ Ti ₅ O ₁₂	(111)	0.022
Li ₇ Ti ₅ O ₁₂	(111)	0.038
α -Li ₂ TiO ₃	(100)	0.039
α -Li ₂ TiO ₃	(110)	0.118
α -Li ₂ TiO ₃	(111)	0.091*

Non-stoichiometric surfaces

Thus far we have considered only stoichiometric surface models. This restricts the possible surfaces to a number that is computationally tractable and simplifies the surface-energy analysis, because the calculated surface energies are independent of the component chemical potentials. Lithium-ion batteries are dynamic systems, however, and it is important to consider the stabilities of competing surfaces under chemical conditions corresponding to cell operation. In particular, the lithium chemical potential, which is proportional to the cell voltage in the limit of reversible charging and discharging, may vary by several eV during cell cycling.

To investigate the effect of chemical conditions on surface stability, we took as starting templates the lowest energy stoichiometric surface models, and constructed a series of surface models with lithium added to or removed from the surface layer. As described above, for both $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and $\text{Li}_7\text{Ti}_5\text{O}_{12}$ the stoichiometric (111) surfaces are more stable when Li-terminated than with

mixed Li/Ti-termination, and we therefore only consider variable lithium-ion surface coverage. We have not performed an exhaustive search of all possible surface configurations and stoichiometries. Instead we use the subset of surface sites occupied in the lowest energy stoichiometric configurations as templates for representative non-stoichiometric structures.

In the lowest energy Li₇Ti₅O₁₂ configuration, the surface-layer lithium is arranged in a hexagonal pattern (Figure 4). The lowest energy Li₄Ti₅O₁₂ configuration displays a similar hexagonal motif, but with some lithium vacancies. In each case, we consider surface models with additional surface lithium placed either in the centre of these hexagons (Li₇Ti₅O₁₂) or completing the hexagonal pattern (Li₄Ti₅O₁₂). Within the DFT+U approach (with $U_{Ti}^{d} = 4.5 \,\mathrm{eV}$), adding surface Li donates additional electrons to the oxide substrate, which are localised at "Ti³⁺" centres. Both Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ have stoichiometric lowest-energy (111) surfaces where lithium occupies two crystallographically distinct surface sites. For each phase, we consider pairs of lithium-deficient surfaces with only one of these sites occupied, and also a fully lithium-deficient surface termination (Figure 6).

Figure 7 plots the surface energies for these variable–lithium-coverage surfaces, calculated using equation 2, versus lithium chemical potential, μ_{Li} . To identify relevant ranges of μ_{Li} , we have calculated the chemical potential spaces where $\text{Li}_4\text{Ti}_5\text{O}_{12}$ is thermodynamically stable with respect to rutile TiO_2 and $\text{Li}_7\text{Ti}_5\text{O}_{12}$, and where $\text{Li}_7\text{Ti}_5\text{O}_{12}$ is thermodynamically stable with respect to $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and Li_2O . The lithium chemical-potential ranges where each phase is thermodynamically unstable are shaded grey in Figure 7.

For Li₄Ti₅O₁₂, the stoichiometric surface is most stable over the full stability range of μ_{Li} . Kitta *et al.* have used STM to characterise Li₄Ti₅O₁₂ (111) surfaces under ambient conditions, ³⁵ and observed a hexagonal pattern of points (attributed to surface lithium) separated by 0.6 nm. This pattern would be consistent with either of the partially lithium-deficient Li₄Ti₅O₁₂ (111) surface models. Our calculations indicate that these surfaces are only stable at particularly low lithium chemical potentials, where bulk Li₄Ti₅O₁₂ is thermodynamically unstable with respect to TiO₂. This suggests that these observed *ex-situ* non-stoichiometric defective samples may be kinetically

stabilised, and might not be representative of the same materials under charging / discharging conditions.

For Li₇Ti₅O₁₂ the stoichiometric surface is favoured over nearly the whole region of thermodynamic stability. Within a narrow region of relatively low μ_{Li} however, close to the stability limit with respect to Li₄Ti₅O₁₂, partially lithium-deficient surfaces become favoured relative to the stoichiometric surfaces.

Electronic properties and thermodynamic reduction drive

The different structures and compositions of competing electrode surfaces correspond to different local potential profiles and electronic structures. These electronic differences are responsible for varied electrochemical behaviour with respect to lithium (de)intercalation, SEI formation, and overall electrode lifetimes. Surfaces with high electron chemical potentials—or equivalently, small workfunctions—should, if solvent relaxation effects are neglected, exhibit a more pronounced thermodynamic drive towards reduction of organic electrolytes, and might promote SEI formation even in the absence of an external applied voltage. ^{14,20} The atomistic details of such processes are at present far from clear. In particular it is unknown to what degree zero-bias (equilibrium formed) SEI's can perform better than SEI's formed during lithium-cycling *i.e.* via non-equilibrium chemistry. Computational modelling offers direct access to the electron chemical potential at different surfaces, and allows us to explore the scope of possible electronic behaviours. Furthermore, by identifying surfaces with noteworthy reduction potentials, we hope to stimulate experimental studies of zero-bias SEI formation in the context of possible improvements to lithium-ion-cell stabilities.

Having identified the low energy surface terminations for $\text{Li}_4\text{Ti}_5\text{O}_{12}$ (111) and $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111), and found the (100) surface preferred for $\alpha\text{-Li}_2\text{TiO}_3$, we calculated vacuum-aligned energies for the highest occupied Kohn-Sham states for these three surfaces, to estimate the thermodynamic reduction drive in each case. These energies, $E_{\text{HOS}}^{\text{vac}}$ were calculated for each slab as the difference between the electrostatic potential plateau for the vacuum and the energy of the highest

occupied Kohn-Sham state, E_{HOKSS}, ⁴⁹ 50

$$E_{\rm HOS}^{\rm vac} = E_{\rm HOKSS} - E_{\rm vacuum}. \tag{3}$$

The vacuum potential and highest-occupied-state energies were calculated in each case using a geometry-optimised "double-thickness" surface slab: 13 layers for $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111) and 12 layers for $\alpha\text{-Li}_2\text{Ti}\text{O}_3$ (100).

The calculated highest-occupied state energies, $E_{\rm HOS}^{\rm vac}$ (Table 2) reveal a significant difference between $\text{Li}_4\text{Ti}_5\text{O}_{12}$ (111) and $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111) of $\Delta E_{\text{HOS}}^{\text{vac}}=2.66\,\text{eV}$. This difference between Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ can be understood by considering the electronic densities of states (Figure 8). In $\text{Li}_4\text{Ti}_5\text{O}_{12}$ all the titanium is in a formal +4 oxidation state, with the Ti 3d states unoccupied, making the highest occupied state the O 2p dominated valence band edge. In Li₇Ti₅O₁₂, however, the additional lithium is charge compensated by electrons that partially reduce the titanium, producing the "Ti³⁺" characteristics identified in the LEED data of Lu et al. ⁷ These occupied Ti³⁺ states reside in the band gap, moving the highest occupied states 2eV above the valence band edge. In addition, the valence and conduction bands are shifted up in energy relative to their positions in $\text{Li}_4\text{Ti}_5\text{O}_{12}$. The large increase in $E^{\text{vac}}_{\text{HOS}}$ for $\text{Li}_7\text{Ti}_5\text{O}_{12}$ is therefore due to occupied band-gap states that lie close to the vacuum level. For α -Li₂TiO₃ E_{HOS}^{vac} is $-4.71\,\text{eV}$; more than $2\,eV$ lower than for $Li_7Ti_5O_{12}$ (111). Despite the higher lithium content, Li_2TiO_3 contains titanium only with a formal +4 oxidation state, and correspondingly the density of states shows no occupied titanium band-gap states (Figure 8(c)), giving a valence band edge position comparable to that of Li₄Ti₅O₁₂. For all three slabs the projected densities of states, generated by projecting onto the PAW projectors, show partial mixing between Ti d and O p states, with very little contribution from Li s states. This is consistent with stronger covalent interactions between Ti-O than Li-O, and hence a larger energy penalty for "dangling bonds" at under-coordinated Ti versus Li, in line with the large surface energies and tendency for spontaneous reconstruction of the Ti-terminated $\text{Li}_{x}\text{Ti}_{5}\text{O}_{12}$ (111) slabs.

Table 2: Calculated vacuum-aligned highest-occupied state energies for the Li₄Ti₅O₁₂ (111), Li₇Ti₅O₁₂ (111), and α -Li₂TiO₃ (100) surfaces (13,13,12 layers). Convergence of E_{HOS}^{vac} with respect to slab thickness is less than 70 meV in all cases, from comparison with values for half-thickness slabs (7,7,6 layers).

Surface	$E_{\rm HOS}^{\rm vac}$ [eV]
Li ₄ Ti ₅ O ₁₂ (111)	-5.272
Li ₇ Ti ₅ O ₁₂ (111)	-2.560
α -Li ₂ TiO ₃ (100)	-5.521

Taking $E_{\text{HOS}}^{\text{vac}}$ of the vacuum exposed surfaces as an approximation to their reduction potential, and neglecting electrolyte adsorption effects, the low values of $E_{\text{HOS}}^{\text{vac}}$ for Li₄Ti₅O₁₂ (111) and α -Li₂TiO₃ (100) versus Li₇Ti₅O₁₂ (111) suggest that the thermodynamic drive for electrolyte reduction at these surfaces is much smaller than at the Li₇Ti₅O₁₂ (111) surface. Where α -Li₂TiO₃ forms as a surface phase during lithium cycling, as described, for example, by Kitta *et al.*, this therefore may be expected to act as an *effective SEI layer* that stabilises the electrode against reductive electrolyte decomposition, and potentially improves electrode stability with respect to repeated charge-cycling.

In contrast, the high value of $E_{\rm HOS}^{\rm vac} = -2.56\,{\rm eV}$ for Li₇Ti₅O₁₂ (111) is notable in having a smaller magnitude than the work function of polycrystalline elemental lithium of $\sim 2.9\,{\rm eV}^{17},^{53}$ indicating an extreme drive for reduction at the pristine Li₇Ti₅O₁₂ (111) surface. Within the approximations of this approach, we expect this to correspond to a strong tendency for electrolyte reduction and SEI formation.⁵⁴ Based on recent advances in local characterization of Li-titanate electrodes by Scanning Probe Microscopies,⁵⁵ this prediction could be the object of future experimental investigations.

Hirayama *et al.* have previously studied SEI formation and structural changes at LiMn₂O₄ cathode surfaces during initial electrolyte wetting and subsequent lithium cycling, using *in situ* surface XRD and high-resolution TEM. ¹⁹ During initial soaking (i.e. under zero bias) the (111) surface of LiMn₂O₄ reacts with the electrolyte to form a dense flat SEI layer. This SEI-encapsulated (111) surface was stable with respect to electrode deterioration during subsequent lithium cycling. In

contrast, electrolyte wetting of the LiMn₂O₄ (110) surface did not form a SEI layer, and during the first lithium charge Mn ions dissolved into the electrolyte — a process associated with electrode degradation. These authors suggested the behaviour of the SEI-encapsulated (111) surface may be due to direct contact between the electrode and electrolyte being blocked by the SEI layer, providing a more stable electrochemical interface, or due to the SEI layer inducing a structural transition at the (111) surface that inhibits Mn dissolution. Irrespective of the mechanism, SEI formation under zero bias at the LiMn₂O₄ (111) surface is correlated with improved electrode stability during lithium cycling. Recent DFT calculated values of $E_{\rm HOS}^{\rm vac}$ for the LiMn₂O₄ (001) and (111) surfaces (following the same approach used here) have found a less negative (smaller magnitude) value for the (111) surface, indicating a larger reduction drive at this surface compared to the (001) surface. ²⁰ When considered alongside the experimental data of Hirayama et al., these results suggest a possible correlation between surface reduction drive, propensity for SEI formation under zero-bias, and subsequent electrochemical performance of the SEI-protected electrode. In this context, we note that He et al. provide experimental evidence for zero-bias SEI formation on Li₄Ti₅O₁₂, ⁵⁶ albeit with no electrochemical characterisation. In concert with the observations of Hirayama et al., this suggests the possibility of zero-bias SEI formation for both cathodic and anodic metal oxide surfaces.

In the specific case of $\text{Li}_x \text{Ti}_5 \text{O}_{12}$, the reduction drive for the pristine $\text{Li}_7 \text{Ti}_5 \text{O}_{12}$ (111) surface is calculated to be even greater than that of metallic lithium, and we predict that this surface will spontaneously reduce common electrolytes under equilibrium conditions. Extrapolating from the study of Hirayama *et al.* we hypothesise that a "zero-bias" SEI formed at this surface may be highly stable, because its formation would not require a driving external potential, and could enhance the cycle lifetime of the underlying electrode. This proposal requires a pristine $\text{Li}_7 \text{Ti}_5 \text{O}_{12}$ (111) (substrate or coating) exposed to the electrolyte. In the study of Kitta *et al.*, ¹¹ the electrochemical cell was constructed using $\text{Li}_4 \text{Ti}_5 \text{O}_{12}$, and a α -Li₂TiO₃ surface layer forms upon electrochemical intercalation, which then separates the (now buried) $\text{Li}_7 \text{Ti}_5 \text{O}_{12}$ (111) surface from the electrolyte. The proposed formation of a protective α -Li₂TiO₃ layer on cycled $\text{Li}_4 \text{Ti}_5 \text{O}_{12}$ is, to the best of our

knowledge, yet to be demonstrated on typical *polycrystalline* Li_xTi₅O₁₂ particles used in practical lithium-ion batteries. In this situation, energetically-favoured Li₇Ti₅O₁₂ (111) surfaces may be exposed to the electrolyte, causing the proposed "zero-bias" mechanism to be realised. To exploit this process in a controlled fashion, for example, by attempting to engineer highly stable SEI layers, both a detailed theoretical understanding of metal oxide surface electrochemistry and experimental characterisation of the formation and subsequent electrochemical performance of zero-bias SEI layers are necessary. We speculate that exploring chemical lithiation or direct synthesis of the relevant lithium-intercalated phase may be rewarding strategies.

More generally, engineering highly reducing metal-oxide surfaces, to form stable SEI layers under zero-bias equilibrium chemistry, is an intriguing and to-date unexplored strategy that requires further exploration through theoretical and experimental studies. We also note that, in concert with this stoichiometry-dependence of reduction drive, it may be possible to further tune the SEI composition, and hence cell performance, by exploiting the different reduction potentials of the varied electrolytes, additives and organic solvents in practical Li-ion batteries. ⁵⁷

Summary and Conclusions

We have performed DFT calculations of Li₄Ti₅O₁₂, Li₇Ti₅O₁₂, and α -Li₂TiO₃ surfaces, to identify their preferred structures, compositions, and the thermodynamic reduction drives. For the Li₄Ti₅O₁₂ (111) and Li₇Ti₅O₁₂ (111) surfaces, we have screened more than 600 symmetry inequivalent structures. For both stoichiometries, lithium-terminated surfaces are more stable than titanium-terminated surfaces, which tend to reconstruct. The lowest energy surfaces have surface energies of 0.022 eV Å⁻² for Li₄Ti₅O₁₂ (111) and 0.038 eV Å⁻² for Li₇Ti₅O₁₂ (111). For α -Li₂TiO₃, we have modelled the (100), (110), and (111) surfaces. The (110) and (111) surface energies are high ($\sim 0.1 \, \text{eV} \, \text{Å}^{-2}$). The (100) α -Li₂TiO₃ surface energy is 0.039 eV Å⁻², which is comparable to the surface energies of Li₄Ti₅O₁₂ (111) and Li₇Ti₅O₁₂ (111). The high energy (110) and (111) surfaces are therefore predicted to be unstable with respect to recon-

struction to facetted (100) surfaces. This is consistent with the surface roughening observed by Kitta *et al.* that accompanies the formation of the α -Li₂TiO₃ surface phase during the first lithium charge/discharge cycle of Li_{4,7}Ti₅O₁₂.

Having identified the lowest energy Li₄Ti₅O₁₂, Li₇Ti₅O₁₂, and α -Li₂TiO₃ surfaces, we have calculated energies of the highest-occupied Kohn-Sham states, which were aligned to the vacuum energy; E_{HOS}^{vac} . This measure serves as an approximation to the surface reduction drive in the absence of any external bias, and indicates the propensity for spontaneous electrolyte decomposition upon substrate wetting. For Li₄Ti₅O₁₂ (111) and α -Li₂TiO₃ (100), $E_{HOS}^{vac} = -5.27$ and -5.52 eV respectively. For $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111), however, $E^{\text{vac}}_{\text{HOS}}=-2.56\,\text{eV}$, which is smaller in magnitude than the work function for metallic lithium (2.8 eV 17,18). This indicates an extreme thermodynamic drive for reduction at the pristine Li₇Ti₅O₁₂ (111) surface, which might be exploited to form a thermodynamically stabilised SEI. This suggestion is conceptually related to the results of Hirayama et al., who have shown that the superior electrochemical performance of the LiMn₂O₄ (111) surface versus the (110) face is correlated with the formation of a highly stable SEI on electrolyte wetting under "zero bias" thermodynamic equilibrium. 19 The extreme reduction potential for the pristine Li₇Ti₅O₁₂ (111) surface suggests that this surface will form an SEI under zero-bias equilibrium conditions. An SEI formed in this way may have different, possibly beneficial, properties relative to conventional SEI formation under an applied bias during the first lithium-insertion. More generally, preparing electrode materials with highly reducing surfaces, in order that thermodynamically stable zero-bias SEI layers form when wetted by an electrolyte, is an intriguing, and to-date unexplored, strategy for engineering highly stable electrodes with improved cycle lifetimes.

Acknowledgements

Support from the EU FP7 program SIRBATT (contract No. 608502) is gratefully acknowledged. B. J. M. acknowledges support from the Royal Society (UF130329), and from EPSRC grant EP/N004302/1. J. C. is supported by the MiNECO through a Ramón y Cajal Fellowship and ac-

knowledges support by the Marie Curie Career Integration Grant FP7-PEOPLE-2011-CiG: Project NanoWGS and the Royal Society through the Newton Alumnus scheme. G. T. is supported by EPSRC-UK (EP/I004483/1). Calculations were performed using HPC Wales, N8 (EPSRC EP/K000225/1), the Barcelona Supercomputer Center (BSC, i2BASQUE), and the ARCHER supercomputer through membership of the UK's HPC Materials Chemistry Consortium, which is funded by EPSRC grant EP/L000202, and membership of the UKCP consortium, funded by grant EP/K013564/1. Raw calculation data and analysis scripts for our bulk and stoichiometric surface calculations are deposited at the University of Liverpool repository. ⁵⁸

Notes and References

- (1) Goodenough, J.; Park, K. S. The Li-ion Rechargeable Battery: A Perspective. *J. Am. Chem. Soc.* **2013**, *135*, 1167–1176.
- (2) Sun, X.; Radovanovic, P. V.; Cui, B. Advances in Spinel Li₄Ti₅O₁₂ Anode Materials for Lithium-Ion Batteries. *New J. Chem.* **2014**, *39*, 38–63.
- (3) Ronci, F.; Reale, P.; Scrosati, B.; Panero, S.; Rossi Albertini, V.; Perfetti, P.; di Michiel, M.; Merino, J. M. High-Resolution In-Situ Structural Measurements of the Li_{4/3}Ti_{5/3}O₄"Zero-Strain" Insertion Material. *J. Phys. Chem. B* 2002, *106*, 3082–3086.
- (4) Ouyang, C. Y.; Zhong, Z. Y.; Lei, M. S. Ab Initio Studies of Structural and Electronic Properties of Li₄Ti₅O₁₂ Spinel. *Electrochem Comm.* **2007**, *9*, 1107–1112.
- (5) Zhong, Z.; Ouyang, C.; Shi, S.; Lei, M. Ab Initio Studies on Li_{4+x}Ti₅O₁₂ Compounds as Anode Materials for Lithium-Ion Batteries. *Chem. Phys. Chem.* **2008**, *9*, 2104–2108.
- (6) Tsai, P. C.; Hsu, W. D.; Lin, S. K. Atomistic Structure and Ab Initio Electrochemical Properties of Li₄Ti₅O₁₂ Defect Spinel for Li Ion Batteries. *J. Electrochem. Soc.* **2013**, *161*, A439–A444.

- (7) Lu, X. et al. Lithium Storage in Li₄Ti₅O₁₂ Spinel: The Full Static Picture from Electron Microscopy. *Adv. Mater.* **2012**, *24*, 3233–3238.
- (8) Ziebarth, B.; Klinsmann, M.; Eckl, T.; Elsässer, C. Lithium Diffusion in the Spinel Phase Li₄Ti₅O₁₂ and in the Rocksalt Phase Li₇Ti₅O₁₂ of Lithium Titanate from First Principles. *Phys. Rev. B* 2014, 89, 174301.
- (9) A notable study of $\text{Li}_x\text{Ti}_5\text{O}_{12}$ surfaces is that of Ganapathy and Wagemaker, who modelled progressive insertion of Li at the (100), (110), and (111) $\text{Li}_4\text{Ti}_5\text{O}_{12}$ surfaces.⁵⁹
- (10) Tompsett, D. A.; Parker, S. C.; Bruce, P. G.; Islam, M. S. Nanostructuring of β -MnO₂: The Important Role of Surface to Bulk Ion Migration. *Chem. Mater.* **2013**, 25, 536–541.
- (11) Kitta, M.; Akita, T.; Maeda, Y.; Kohyama, M. Study of Surface Reaction of Spinel Li₄Ti₅O₁₂ during the First Lithium Insertion and Extraction Processes Using Atomic Force Microscopy and Analytical Transmission Electron Microscopy. *Langmuir* **2012**, 28, 12384–12392.
- (12) Scholl, D. S.; Steckel, J. A. DFT Calculations for Surfaces of Solids. In *Density Functional Theory: A Practical Introduction*; John Wiley & Sons, Inc., 2009; Chapter 4.
- (13) Gao, Y.; Wang, Z.; Chen, L. Stability of spinel Li₄Ti₅O₁₂ in air. *J. Power Sources* **2014**, 245, 684–690.
- (14) Gao, Y.; Wang, Z.; Chen, L. Workfunction, a new viewpoint to understand the electrolyte/electrode interface reaction. *J. Mater. Chem. A* **2015**, *3*, 23420–23425.
- (15) Weber, V.; Laino, T.; Curioni, A.; Eckl, T.; Engel, C.; Kasemchainan, J.; Salingue, N. Computational Study of Lithium Titanate as a Possible Cathode Material for Solid-State Lithium—Sulfur Batteries. J. Phys. Chem. C 2015, 119, 9681–9691.
- (16) The energy difference between the highest occupied state and the vacuum energy for $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111) increases to $\sim 3\,\text{eV}$ for non-stoichiometric Li-excess or deficient surfaces.

- (17) Michaelson, H. B. The Work Function of the Elements and its Periodicity. *J. Appl. Phys.* **1977**, *48*, 4729–4733.
- (18) Koch, S. L.; Morgan, B. J.; Passerini, S.; Teobaldi, G. Density Functional Theory Screening of Gas-Treatment Strategies for Stabilization of High Energy-Density Lithium Metal Anodes. *J. Power Sources* **2015**, *296*, 150–161.
- (19) Hirayama, M.; Ido, H.; Kim, K.; Cho, W.; Tamura, K.; Mizuki, J.; Kanno, R. Dynamic Structural Changes at LiMn₂O₄/Electrolyte Interface during Lithium Battery Reaction. *J. Am. Chem. Soc.* **2010**, *132*, 15268–15276.
- (20) Scivetti, I.; Teobaldi, G. (Sub) Surface-Promoted Disproportionation and Absolute Band Alignment in High-Power LiMn₂O₄ Cathodes. *J. Phys. Chem. C* **2015**, *119*, 21358–21368.
- (21) Kresse, G.; Furthmüller, J. Efficient Iterative Schemes for Ab Initio Total-Energy Calculations Using a Plane-Wave Basis Set. *Phys. Rev. B* **1996**, *54*, 11169–11186.
- (22) Kresse, G.; Furthmuller, J. Efficiency of Ab-Initio Total Energy Calculations for Metals and Semiconductors using a Plane-Wave Basis Set. *Comp. Mater. Sci.* **1996**, *6*, 15–50.
- (23) Blöchl, P. E. Projector Augmented-Wave Method. *Phys. Rev. B* **1994**, *50*, 17953–17979.
- (24) Kresse, G.; Joubert, D. From Ultrasoft Pseudopotentials to the Projector Augmented-Wave Method. *Phys. Rev. B* **1999**, *59*, 1758–1775.
- (25) Perdew, J. P.; Burke, K.; Ernzerhof, M. Generalized Gradient Approximation Made Simple. *Phys. Rev. Lett.* **1996**, *77*, 3865–3868.
- (26) Pacchioni, G.; Frigoli, F.; Ricci, D.; Weil, J. A. Theoretical Description of Hole Localization in a Quartz Al Center: The importance of Exact Electron Exchange. *Phys. Rev. B* **2000**, *63*, 054102.

- (27) Zhou, F.; Cococcioni, M.; Marianetti, C. A.; Morgan, D.; Ceder, G. First-Principles Prediction of Redox Potentials in Transition-Metal Compounds with LDA+*U*. *Phys. Rev. B* **2004**, 70, 235121.
- (28) Mori-Sánchez, P.; Cohen, A. J.; Yang, W. Localization and Delocalization Errors in Density Functional Theory and Implications for Band-Gap Correction. *Phys. Rev. Lett.* **2008**, *100*, 146401.
- (29) Allen, J. P.; Scanlon, D. O.; Watson, G. W. Electronic Structure of Mixed-Valence Silver Oxide AgO from Hybrid Density-Functional Theory. *Phys. Rev. Lett.* **2010**, *81*, 161103.
- (30) Chen, J.; Wu, X.; Selloni, A. Electronic structure and bonding properties of cobalt oxide in the spinel structure. *Phys. Rev. B* **2011**, *83*, 245204.
- (31) Padilha, A. C. M.; Osorio-Guillén, J. M.; Rocha, A. R.; Dalpian, G. M. Ti_nO_{2n-1} Magnéli Phases Studied using Density Functional Theory. *Phys. Rev. B* **2014**, *90*, 035213.
- (32) Morgan, B. J.; Watson, G. W. Intrinsic *n*-Type Defect Formation in TiO₂: A Comparison of Rutile and Anatase from GGA+*U* Calculations. *J. Phys. Chem. C* **2010**, *114*, 2321–2328.
- (33) Morgan, B. J.; Watson, G. W. Polaronic Trapping of Electrons and Holes in Anatase TiO₂. *Phys. Rev. B* **2009**, *80*, 233102.
- (34) Kataoka, K.; Takahashi, Y.; Kijima, N.; Akimoto, J.; Ohshima, K.-i. Single crystal growth and structure refinement of Li₄Ti₅O₁₂. *J. Phys. Chem. Sol.* **2008**, *69*, 1454–1456.
- (35) Kitta, M.; Matsuda, T.; Maeda, Y.; Akita, T.; Tanaka, S.; Kido, Y.; Kohyama, M. Atomistic structure of a spinel Li₄Ti₅O₁₂(111) surface elucidated by scanning tunneling microscopy and medium energy ion scattering spectrometry. *Surf. Sci.* **2014**, *619*, 5–9.
- (36) Ziebarth *et al.* have calculated lithium diffusion barriers between 0.30–0.48 eV for Li₄Ti₅O₁₂ and between 0.20–0.51 eV for Li₇Ti₅O₁₂, ⁸.

- (37) Zeng, Q.; Li, W.; Shi, J. L.; Guo, J. K.; Zuo, M. W.; Wu, W. J. A New Microwave Dielectric Ceramic for LTCC Applications. *J. Am. Ceram. Soc.* **2006**, *89*, 1733–1735.
- (38) Roux, N.; Avon, J.; Floreancig, A.; Mougin, J.; Rasneur, B.; Ravel, S. Low-Temperature Tritium Releasing Ceramics as Potential Materials for the ITER Breeding Blanket. *J. Nucl. Mater.* **1996**, *233*, 1431–1435.
- (39) Azuma, K.; Dover, C.; Grinter, D. C.; Grau-Crespo, R.; Almora-Barrios, N.; Thornton, G.; Oda, T.; Tanaka, S. Scanning Tunneling Microscopy and Molecular Dynamics Study of the Li₂TiO₃(001) Surface. *J. Phys. Chem. C* **2013**, *117*, 5126–5131.
- (40) The VASP input files and optimised geometry for this lowest energy α -Li₂TiO₃ structure are available at the NOMAD repository.⁶⁰
- (41) Morgan, B. J. Two Dimensional Nanosystems. In *Computational Modelling of Inorganic Nanomaterials*; Bromley, S. T., Zwijnenberg, M. A., Eds.; CRC Press, 2016; Chapter 3.
- (42) Tasker, P. W. The Stability of Ionic Crystal Surfaces. *J. Phys. C: Solid State Phys.* **1979**, *12*, 4977–4984.
- (43) Morgan, B. J. bsym. http://dx.doi.org/10.5281/zenodo.57951.
- (44) Deacon-Smith, D. E. E.; Scanlon, D. O.; Catlow, C. R. A.; Sokol, A. A.; Woodley, S. M. Interlayer Cation Exchange Stabilizes Polar Perovskite Surfaces. *Adv. Mater.* **2014**, n/a–n/a.
- (45) Wang, Q.; Oganov, A. R.; Zhu, Q.; Zhou, X. New Reconstructions of the (110) Surface of Rutile TiO₂ Predicted by an Evolutionary Method. *Phys. Rev. Lett.* **2014**, *113*, 266101.
- (46) Our calculated surface energies for the lowest energy D-terminated surfaces of both $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and $\text{Li}_7\text{Ti}_5\text{O}_{12}$ are $\sim 0.1\,\text{eV}\,\text{Å}^{-2}$, which is comparable to the surface energies reported by Weber *et al.* ¹⁵.
- (47) Watson, G. W.; Kelsey, E. T.; de Leeuw, N. H.; Harris, D. J.; Parker, S. C. Atomistic Simulation of Dislocations, Surfaces and Interfaces in MgO. *Faraday Trans.* **1996**, *92*, 433–438.

- (48) Morgan, B. J.; Teobaldi, G. In Preparation.
- (49) Neugebauer, J.; Scheffler, M. Adsorbate–Substrate and Adsorbate-Adsorbate Interactions of Na and K Adlayers on Al(111). *Phys. Rev. B* **1992**, *46*, 16067–16080.
- (50) Gao *et al.* have recently explored the reduction potential for structurally related LiTi₂O₄ (111) surfaces using this technique, with the quantity E_{HOS}^{vac} denoted therein as the surface "workfunction". ¹⁴
- (51) Verde *et al.* have recently performed hybrid DFT calculations on Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂. ⁵⁵ They also predicted partially occupied Ti d states for Li₇Ti₅O₁₂, corresponding to an upward shift of the Fermi energy, and qualitatively agreeing with the description we present here.
- (52) Our approximate measure of thermodynamic drive for electrolye reduction provides no information about the *kinetics* of any such process, which can be expected to depend on factors including the energy alignment of the Fermi energy and electrolyte LUMO, and the spatial overlap of the relevant frontier orbitals.
- (53) The work function for metallic Li (111) calculated with DFT/PBE is $2.84\,eV.^{18}$
- (54) $E_{\rm HOS}^{\rm vac}$ is sensitive to the exact surface termination, but remains small compared to Li₄Ti₅O₁₂ for lithium excessive and deficient Li₇Ti₅O₁₂ surfaces. For the non-stoichiometric surfaces considered in this work $E_{\rm HOS}^{\rm vac} = 3.13\,{\rm eV}$ (+2 Li), 4.22 eV (-2 Li_A), and 3.01 eV (-2 Li_B).
- (55) Verde, M. G.; Baggetto, L.; Balke, N.; Veith, G. M.; Seo, J. K.; Wang, Z.; Meng, Y. S. Elucidating the Phase Transformation of Li₄Ti₅O₁₂ Lithiation at the Nanoscale. *ACS Nano* **2016**, *10*, 4312–4321.
- (56) He, Y.-B. et al. Gassing in Li₄Ti₅O₁₂-based batteries and its remedy. Sci. Rep. **2012**, 2, 1–9.
- (57) Delp, S. A.; Borodin, O.; Olguin, M.; Eisner, C. G.; Allen, J. L.; Jow, T. R. Importance of Reduction and Oxidation Stability of High Voltage Electrolytes and Additives. *Electrochim.* Acta 2016, 209, 498–510.

- (58) Morgan, B. J.; Carrasco, J.; Teobaldi, G. *Lithium Titanate Spinel Surfaces Dataset*, url to be updated on acceptance, 2016.
- (59) Ganapathy, S.; Wagemaker, M. Nanosize Storage Properties in Spinel Li₄Ti₅O₁₂ Explained by Anisotropic Surface Lithium Insertion. *ACS Nano* **2012**, *6*, 8702–8712.
- (60) Morgan, B. J.; Carrasco, J.; Teobaldi, G. α-Li₂TiO₃ Data Repository [Accessed 2016-01-5]. http://dx.doi.org/10.17172/NOMAD/2016.01.05-1.

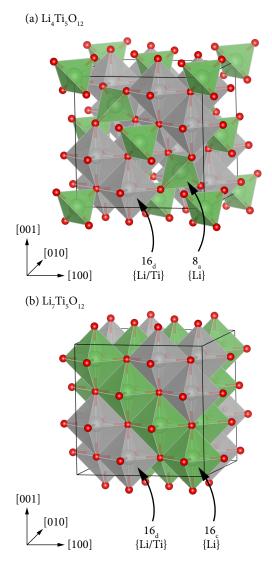


Figure 1: Unit cells of (a) $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and (b) $\text{Li}_7\text{Ti}_5\text{O}_{12}$. In both structures, oxygen ions (red) form an fcc lattice, occupying the 32e sites, and the 16d octahedral sites (grey) are occupied by titanium and lithium at a ratio of 5: 1. In (a) $\text{Li}_4\text{Ti}_5\text{O}_{12}$, lithium also occupies the 8a tetrahedra (green). In (b) $\text{Li}_7\text{Ti}_5\text{O}_{12}$, all cations are in octahedral sites, with the 16d octahedral sites (grey) occupied by titanium and lithium at a ratio of 5: 1, and lithium in the 16c octahedra (green).

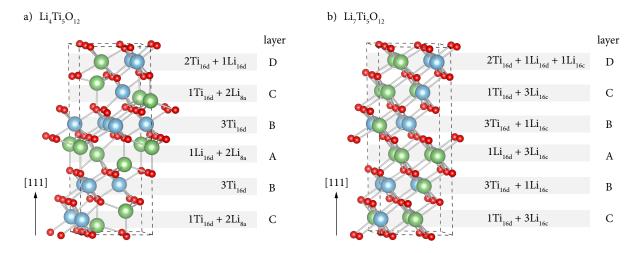


Figure 2: Structures of (a) $\text{Li}_4\text{Ti}_5\text{O}_{12}$, and (b) $\text{Li}_7\text{Ti}_5\text{O}_{12}$, with the (111) close-packed direction oriented along c. For each close-packed layer, the relative number of Ti and Li cations in each crystallographic site are given. Both structures can be considered an array of (111) close-packed layers, with [...ABCDCBA...] stacking sequence.

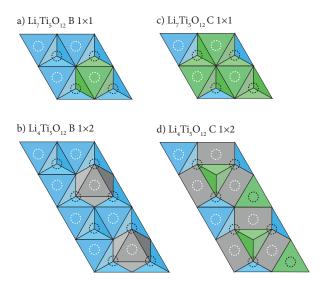


Figure 3: Schematic of the sub-surface unit cells used for generating the surface configurations. Blue and green polyhedra correspond to titanium and lithium occupied sites, respectively, and grey shows empty volume in the layer. Sites considered for the surface atoms are represented by dashed circles. White circles are surface tetrahedral sites, and black circles are surface octahedral sites. A-terminated surface models are constructed by partial occupation of the surface sites on the B sub-surface (a and b); D-terminated surface models are constructed by partial occupation of the surface sites on the C sub-surface (c and d).

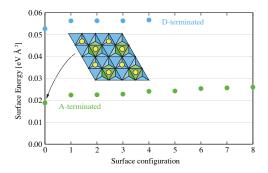


Figure 4: Surface energies in $eV \mbox{\ensuremath{\mbox{A}}}^{-2}$ of the A-terminated and D-terminated Li₇Ti₅O₁₂ (111) surface slabs. Blue and green octahedra show titanium and lithium occupied subsurface sites, respectively. Yellow circles show lithium positions.

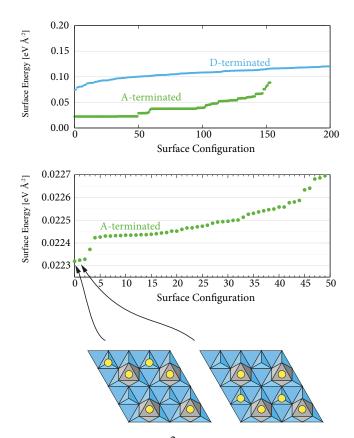


Figure 5: Top panel: Surface energies in eV ${\mathring{A}}^{-2}$ of the A-terminated and D-terminated Li₄Ti₅O₁₂ (111) oriented surface slabs. Only data for the 200 lowest energy D-terminated surfaces are shown. Middle panel: Surface energies of the 50 lowest energy A-terminated surfaces. These data were calculated using the [Ar] core pseudopotential for Ti. Bottom panel: The lowest surface energy configurations for Li₄Ti₅O₁₂ (A-terminated). Blue and grey octahedra show titanium-occupied and vacant subsurface sites, respectively. Yellow circles show lithium positions.

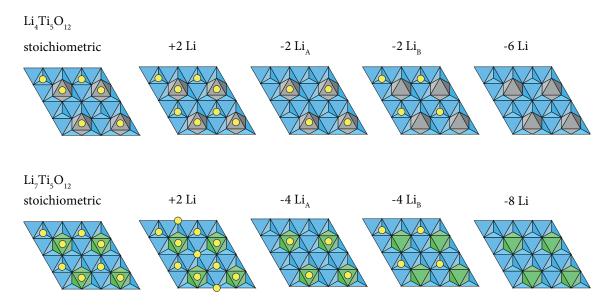


Figure 6: Schematic of the stoichiometric and variable lithium-coverage A-terminated surface models that were calculated for $\text{Li}_4\text{Ti}_5\text{O}_{12}$ and $\text{Li}_7\text{Ti}_5\text{O}_{12}$.

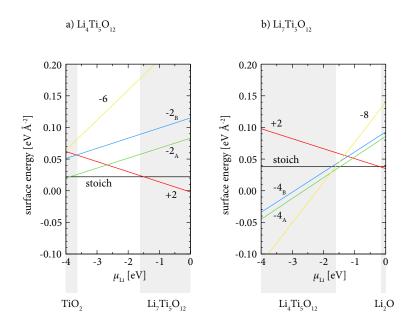


Figure 7: μ_{Li} -dependent surface energies for A-terminated Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ (111) surfaces. The shaded regions show lithium chemical potentials where Li₄Ti₅O₁₂ and Li₇Ti₅O₁₂ are predicted to be thermodynamically unstable for unconstrained oxygen / titanium chemical potentials. ⁴⁸

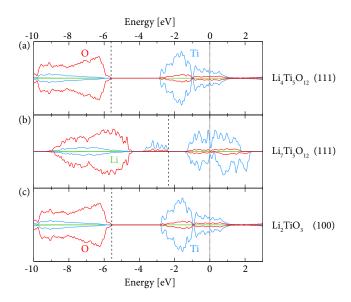


Figure 8: Projected densities of states for the (a) $\text{Li}_4\text{Ti}_5\text{O}_{12}$ (111), (b) $\text{Li}_7\text{Ti}_5\text{O}_{12}$ (111), and (c) $\alpha\text{-Li}_2\text{TiO}_3$ (100) surface slabs (13,13,12 layers). In each case the energy scale uses the vacuum energy as zero, shown with the solid vertical line. The energies of the highest occupied states are shown with dashed vertical lines. Contributions from Li s are shown in green, O p in red, and Ti d in blue.